

## Features

- Nominal Coupling 30dB
- Low Coupling Balance  $\pm 1$ dB
- Low Insertion Loss 0.5dB
- RoHS and REACH Compliant
- High Directivity 15dB

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	9.3		9.5
Nominal Coupling	dB		30	
Coupling Balance	dB		$\pm 1$	
Insertion Loss (True)	dB			0.5
Freq. Flatness	dB			0.7
Main Line VSWR				1.5
Secondary Line VSWR				1.5
Directivity	dB	15		
Input Power (CW)	W			200
Input Power (Peak)	KW			1.5
Impedance	Ohms		50	
Operating Temp.	°C	-40		+70

## Special Requirements

Peak Power : 1500W ( Duty cycle : 10%, pulse width: 100us)

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Insertion Loss Including Nominal Coupling Loss 0.004 dB. ;
- Relative Humidity 5 to 95% ;


**Mechanical Specifications**

Dimension L*W*H	48.3*25.1*31 mm
Input Connector	N-Female Stainless Steel
Output Connectors	N-Female Stainless Steel
Weight	TBD g
Finishing	Paint Black
Environment	Nominal

**Compliance Certifications**

RoHS Compliant	✓
REACH Compliant	✓

**CAD Drawing**

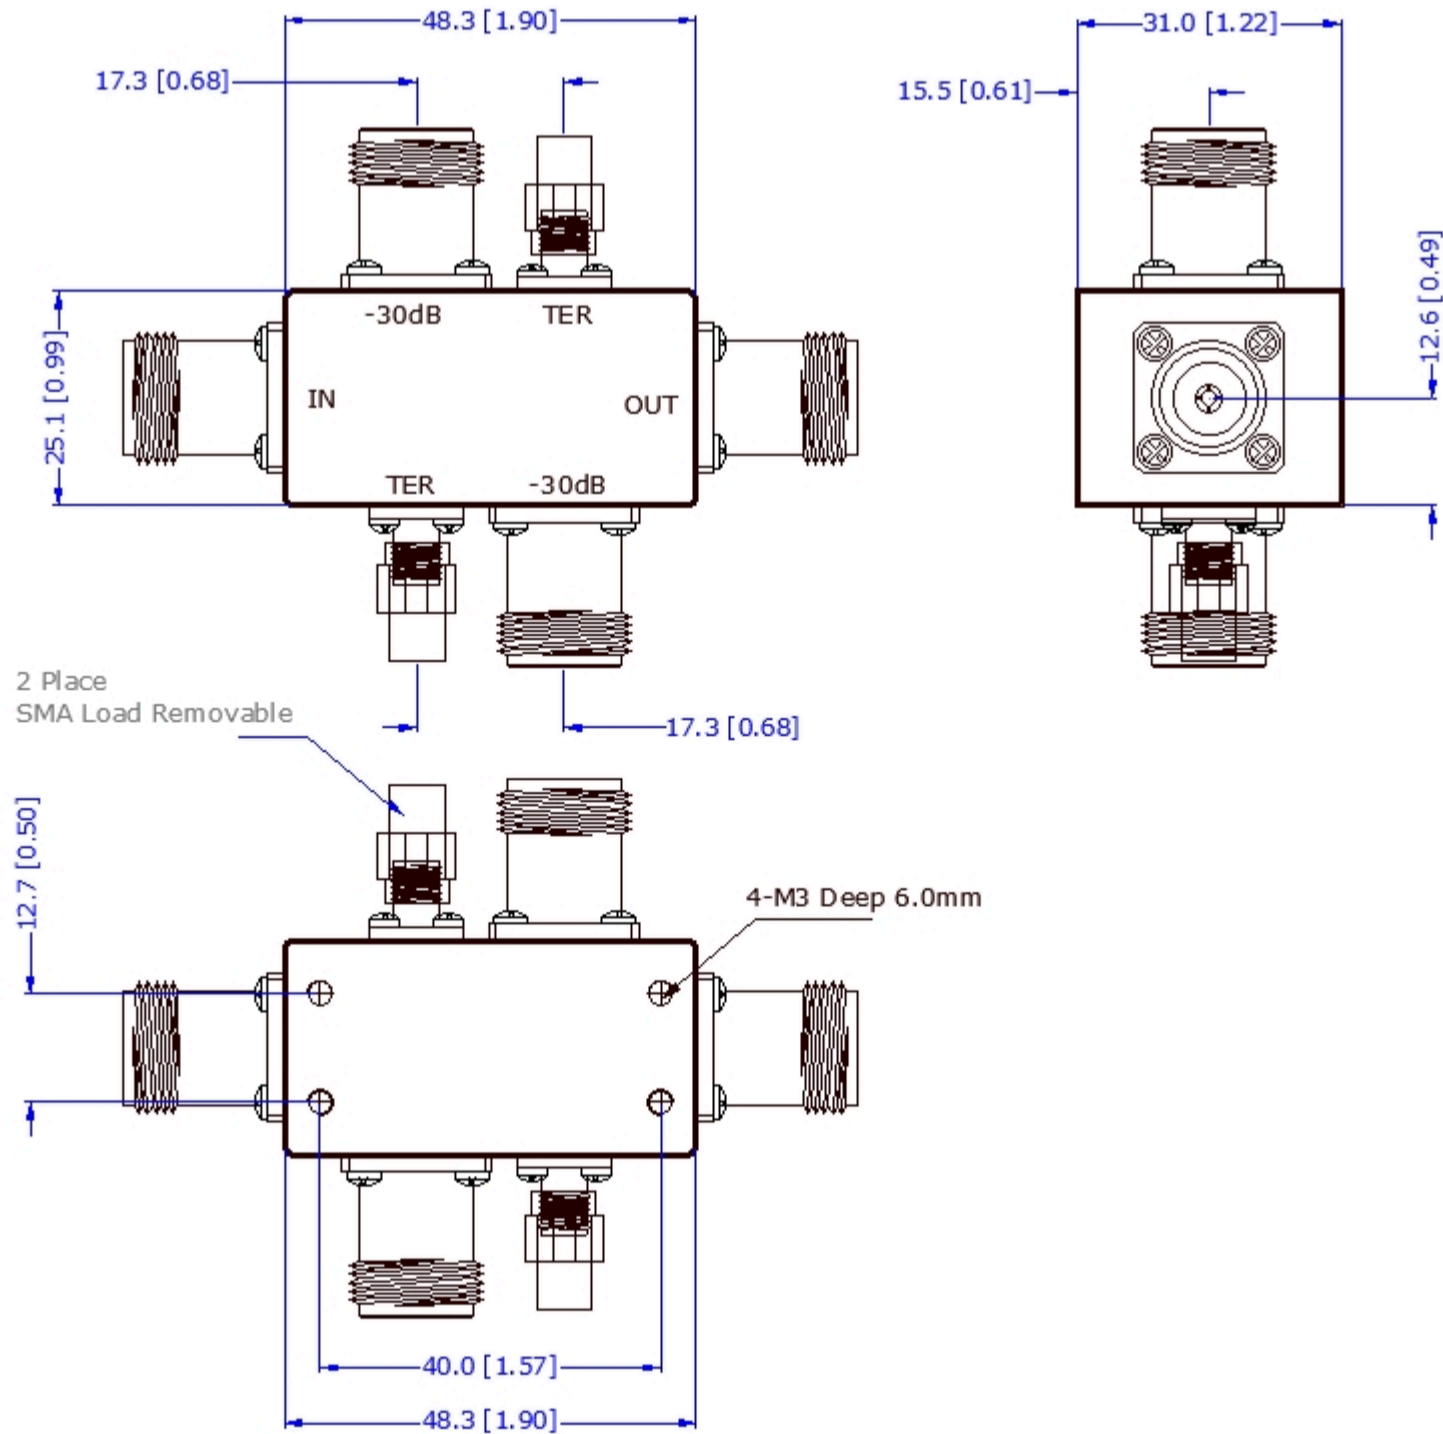

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing: ±0.2 [0.008]  
 Hole: ±0.2 [0.008]