

## Features

- Nominal Coupling 10dB
- Low Coupling Balance  $\pm 1.5$ dB
- Low Insertion Loss 2dB
- RoHS and REACH Compliant
- High Directivity 12dB

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	2		26.5
Nominal Coupling	dB		10	
Coupling Balance	dB	$\pm 1$	$\pm 1.5$	
Insertion Loss (True)	dB			2
Freq. Flatness	dB			2.0
Main Line VSWR				1.5
Secondary Line VSWR				1.6
Directivity	dB	12		
Input Power (CW)	W			30
Input Power (Peak)	KW			0.5
Impedance	Ohms		50	
Operating Temp.	°C	-45		+85

## Special Requirements

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Insertion Loss Including Nominal Coupling Loss 0.46 dB. ;
- Relative Humidity 5 to 95% ;


### Mechanical Specifications

Dimension L*W*H	48*15*12.7 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	TBD g
Finishing	Paint Black
Environment	Nominal

### Compliance Certifications

RoHS Compliant	✓
REACH Compliant	✓

### CAD Drawing

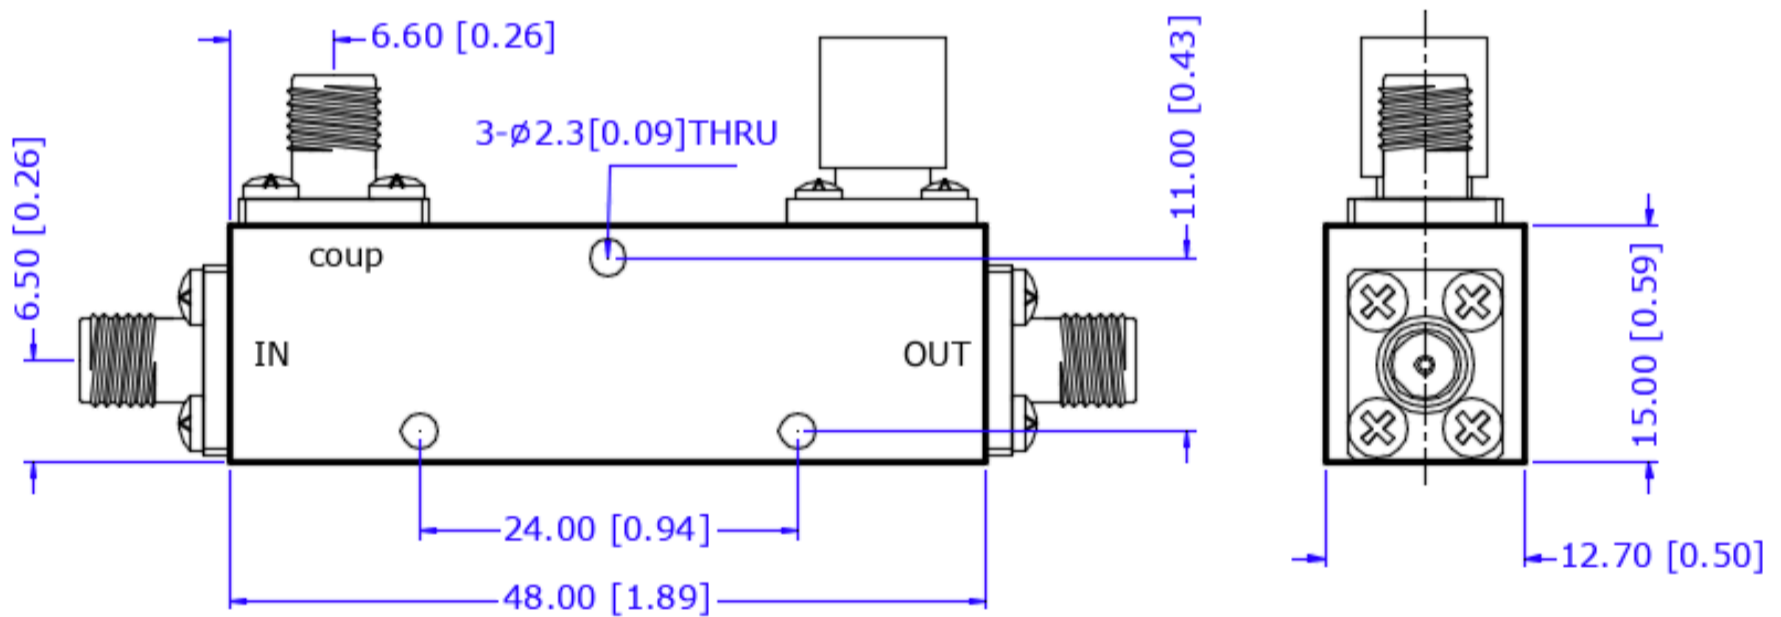

DC0005

Dimensions are in mm [Inches]  
Tolerances : Outline drawing: ±0.2 [0.008]  
Hole: ±0.2 [0.008]