

## Features

- Low Phase Balance 20dB
- Low Insertion Loss 3.0dB
- Low Amplitude Balance 2.0dB
- RoHS and REACH Compliant
- High Isolation 15dB

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	1		12.4
Phase Difference	deg		180	
Insertion Loss	dB			3.0
VSWR				1.6
Amplitude Balance	dB			2.0
Phase Balance	deg			20
Isolation	dB	15		
Input Power (CW)	W			30
Input Power (Peak)	KW			0.5
Impedance	Ohms		50	
Operating Temp.	°C	-45		+85

## Special Requirements

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Insertion Loss : Excludes Coupling loss insertion loss ;
- Relative Humidity 5 to 95% ;


### Mechanical Specifications

Dimension L*W*H	139.7*39.6*12.7 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	TBD g
Finishing	[F8YL9F8]
Environment	Paint Black

### Compliance Certifications

RoHS Compliant	Nominal
REACH Compliant	Nominal

### CAD Drawing

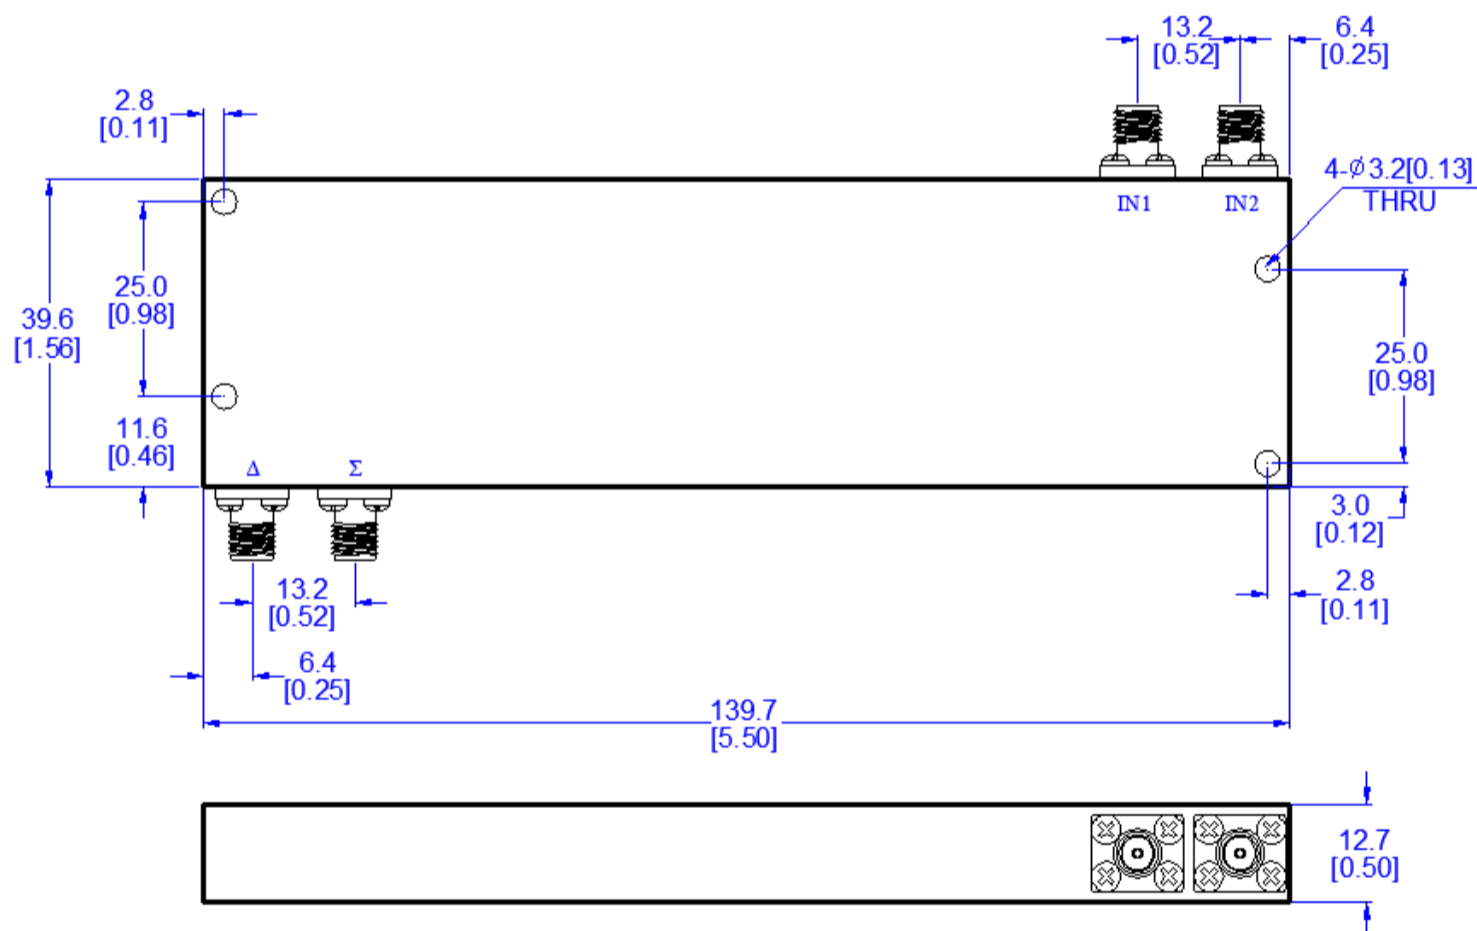

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing: ±0.2 [0.008]  
 Hole: ±0.2 [0.008]