

## Features

- Low Phase Balance 6dB
- Low Insertion Loss 0.35dB
- Low Amplitude Balance 1.0dB
- RoHS and REACH Compliant
- High Isolation 20dB

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	4		8
Phase Difference	deg		90	
Insertion Loss	dB			0.35
VSWR				1.3
Amplitude Balance	dB			1.0
Phase Balance	deg			6
Isolation	dB	20		
Input Power (CW)	W			50
Input Power (Peak)	KW			1
Impedance	Ohms		50	
Operating Temp.	°C	-40		+85

## Special Requirements

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Insertion Loss : Excludes Coupling loss insertion loss ;
- Relative Humidity 5 to 95% ;


**Mechanical Specifications**

Dimension L*W*H	25.7*13*12.7 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	22 g
Finishing	[F8YL9F8]
Environment	Paint Black

**Compliance Certifications**

RoHS Compliant	Nominal
REACH Compliant	Nominal


**CAD Drawing**

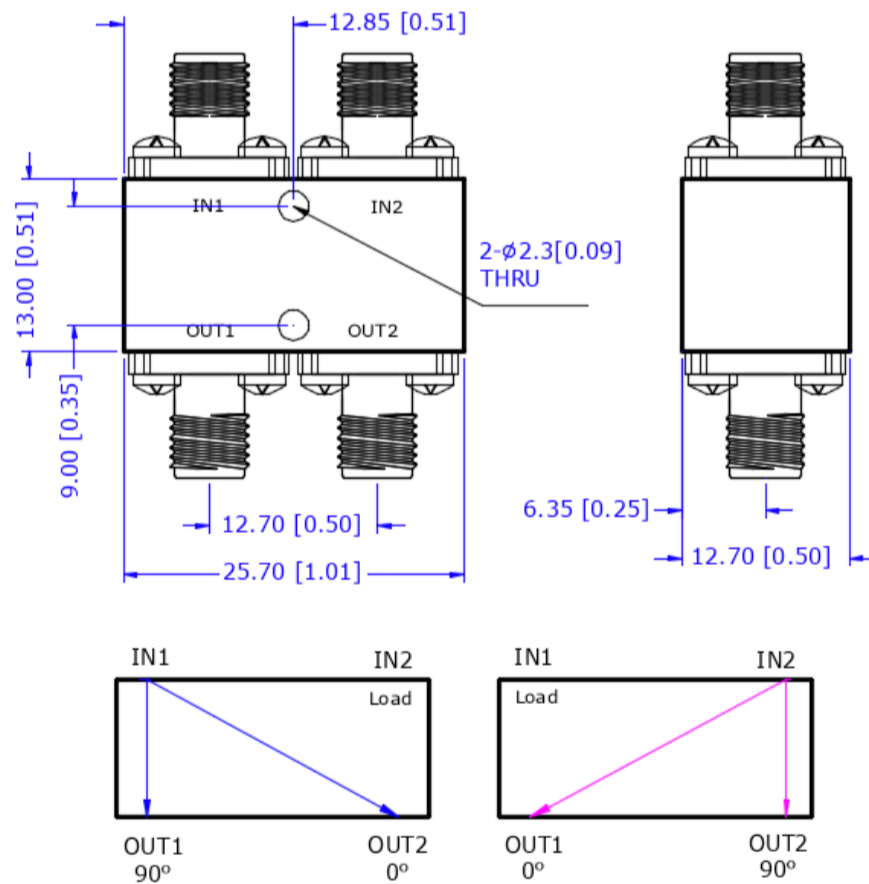


HC9-00003

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing: ±0.2 [0.008]  
 Hole: ±0.2 [0.008]


## Input Port VSWR

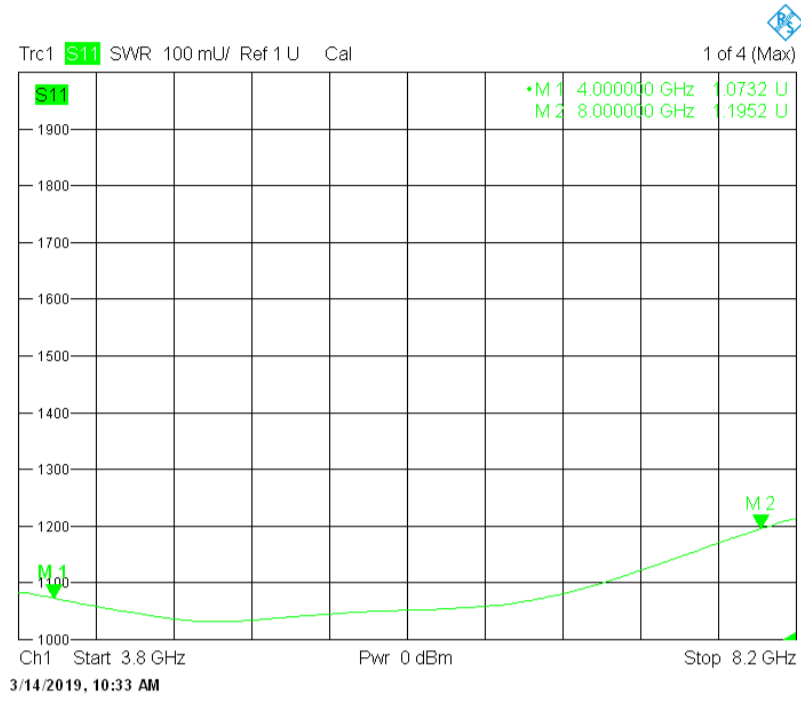


## Output Port VSWR

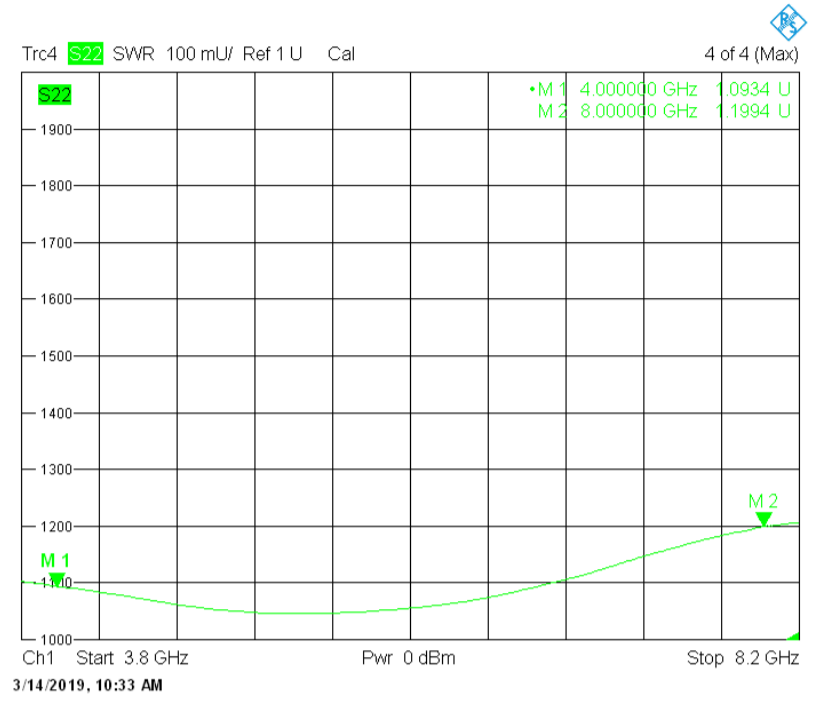

## Insertion Loss

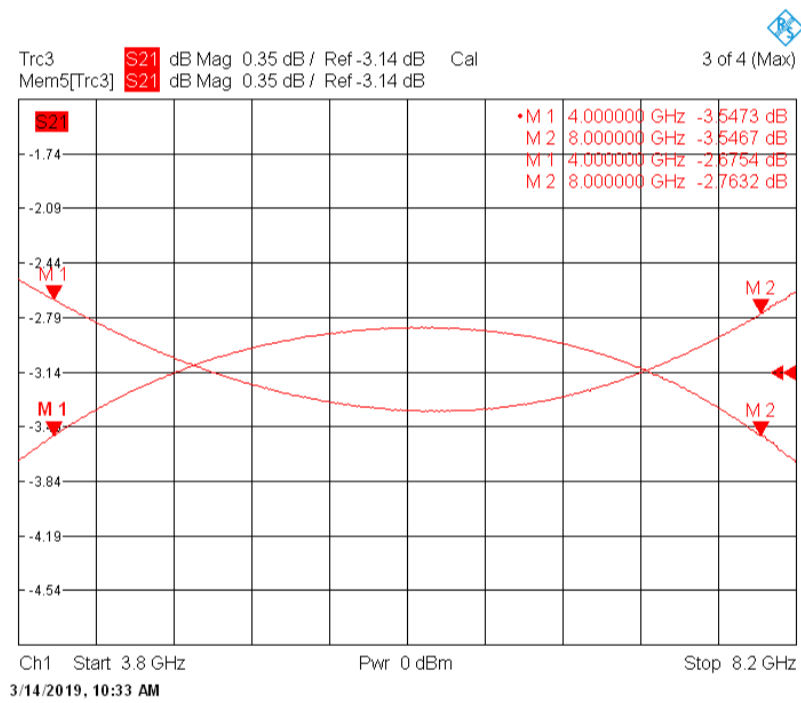

## Isolator

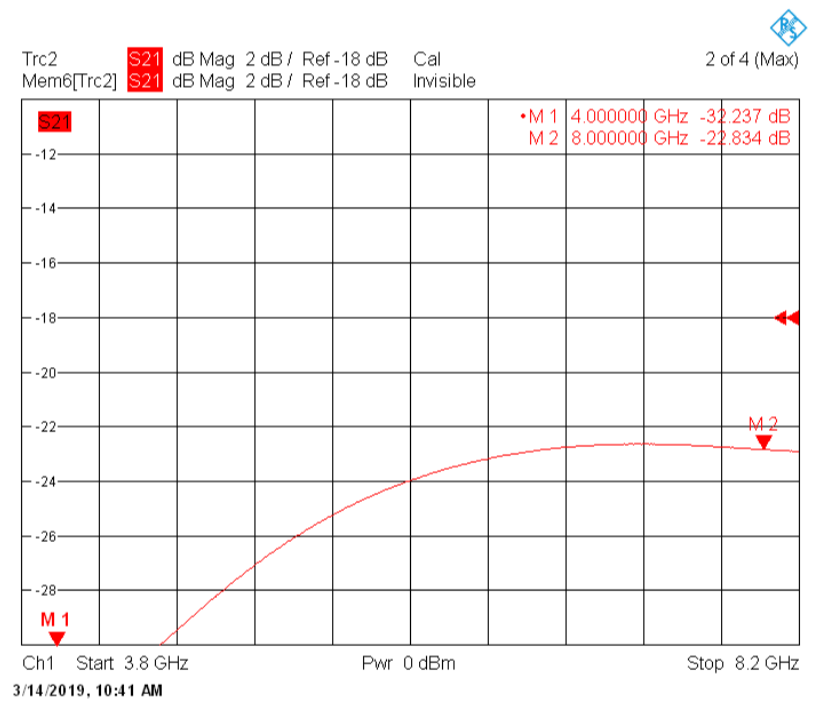

## Amplitude Balance

## Phase Balance

