

## Features

- Small Signal Gain 25dB
- Low Gain Flatness
- Input VSWR 1.2
- Output Power 8dBm
- RoHS and REACH Compliant

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	2.7		3.3
Max input Power	dBm			15
Small Signal Gain	dB	25		
Gain Flatness	dB			±0.5
Noise figure	dB			1.8
Output Power @P1dB	dBm	8		10
Input VSWR	: 1			1.2
Output VSWR	: 1			1.15
OIP3	dBm		-	
TTL Control				
TTL Switching Time	us			
Supply Current (Vcc=+15V)	mA		100	
Operating Temp.	°C	-40		+70

## Special Requirements

**Note**

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- ESD sensitive material , Transport material in approved ESD bags. Handle only in approved ESD workstation;
- Providing effective cooling measures and electrostatic protection;
- If the product is damaged due to over-drive, no-load, over-temperature, over-current and static electricity in use. Customer needs to pay for the cost of maintenance.


**Mechanical Specifications**

Dimension L*W*H	34.4*16.8*8.1 mm
Input Connector	SMA-Female
Output Connector	SMA-Female
Weight	TBD g
VDC Connector	PIN </td
Finishing	Nickel Plated
Environment	X

**Compliance Certifications**

RoHS Compliant	✓
REACH Compliant	✓

**CAD Drawing**

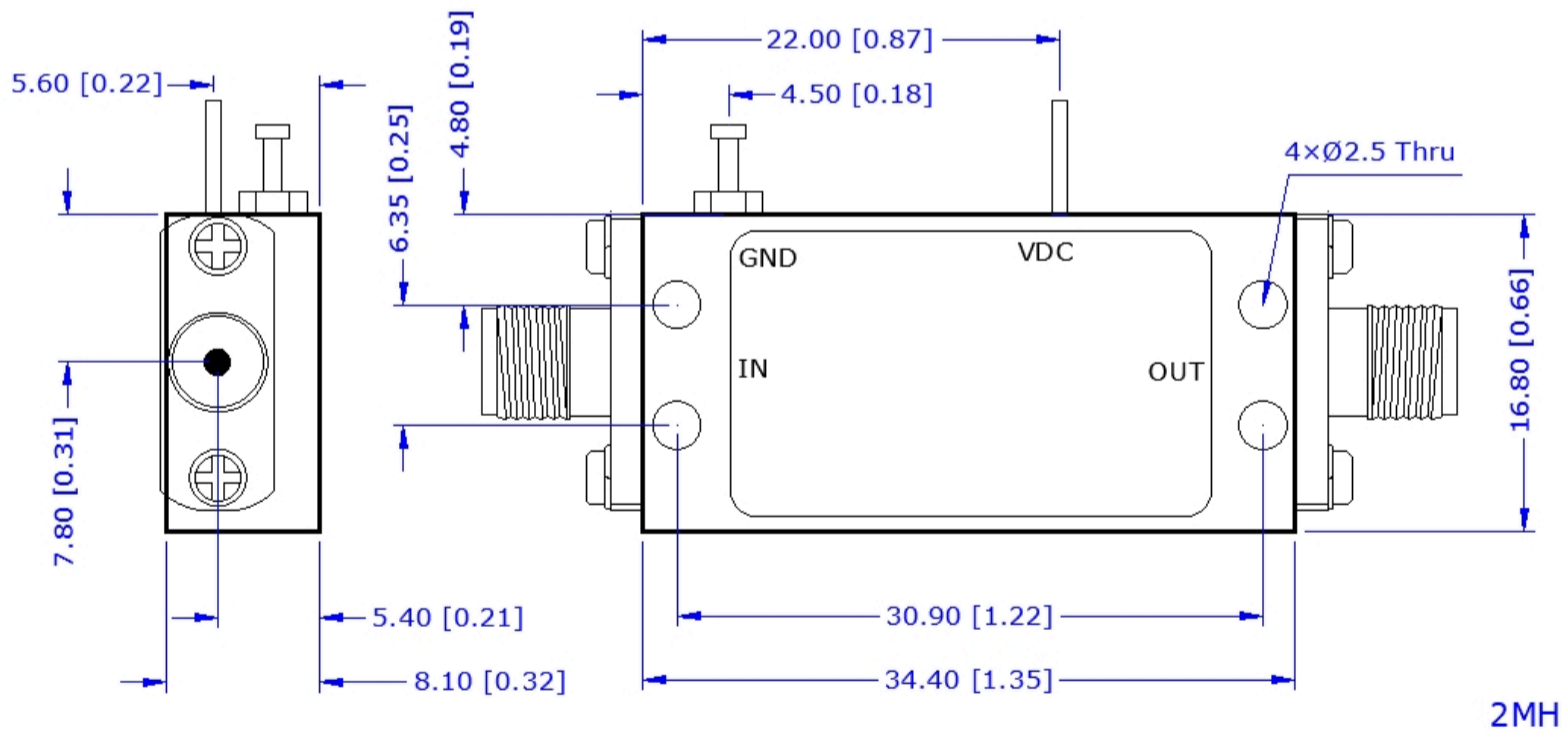

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing: ±0.2 [0.008]  
 Hole: ±0.2 [0.008]