

## Features

- Small Signal Gain 16dB
- Low Gain Flatness
- Input VSWR 1.9
- Output Power 17dBm
- RoHS and REACH Compliant

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	2.5		6
Small Signal Gain	dB	16		
Gain Flatness	dB			±1
Noise figure	dB		4.0	
Output Power @P1dB	dBm	17		
Input VSWR	: 1			1.9
Output VSWR	: 1			1.9
OIP3	dBm		-	
Reverse Isolation	dB	-		
Spurious	dBc	-		
Harmonics	dBc			
TTL Control				
TTL Switching Time	us		-	
Supply Current (Vcc=+5V)	mA		150	
Operating Temp.	°C	-40		+70

## Special Requirements

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- ESD sensitive material , Transport material in approved ESD bags. Handle only in approved ESD workstation;
- Providing effective cooling measures and electrostatic protection;
- If the product is damaged due to over-drive, no-load, over-temperature, over-current and static electricity in use. Customer needs to pay for the cost of maintenance.


## Mechanical Specifications

Dimension L*W*H	34.4*16.8*8.1 mm
Input Connector	SMA-Female Stainless Steel
Output Connector	SMA-Female Stainless Steel
Weight	20 g
Finishing	Nickel Plated
Environment	X

## Compliance Certifications

RoHS Compliant	✓
REACH Compliant	✓

## CAD Drawing

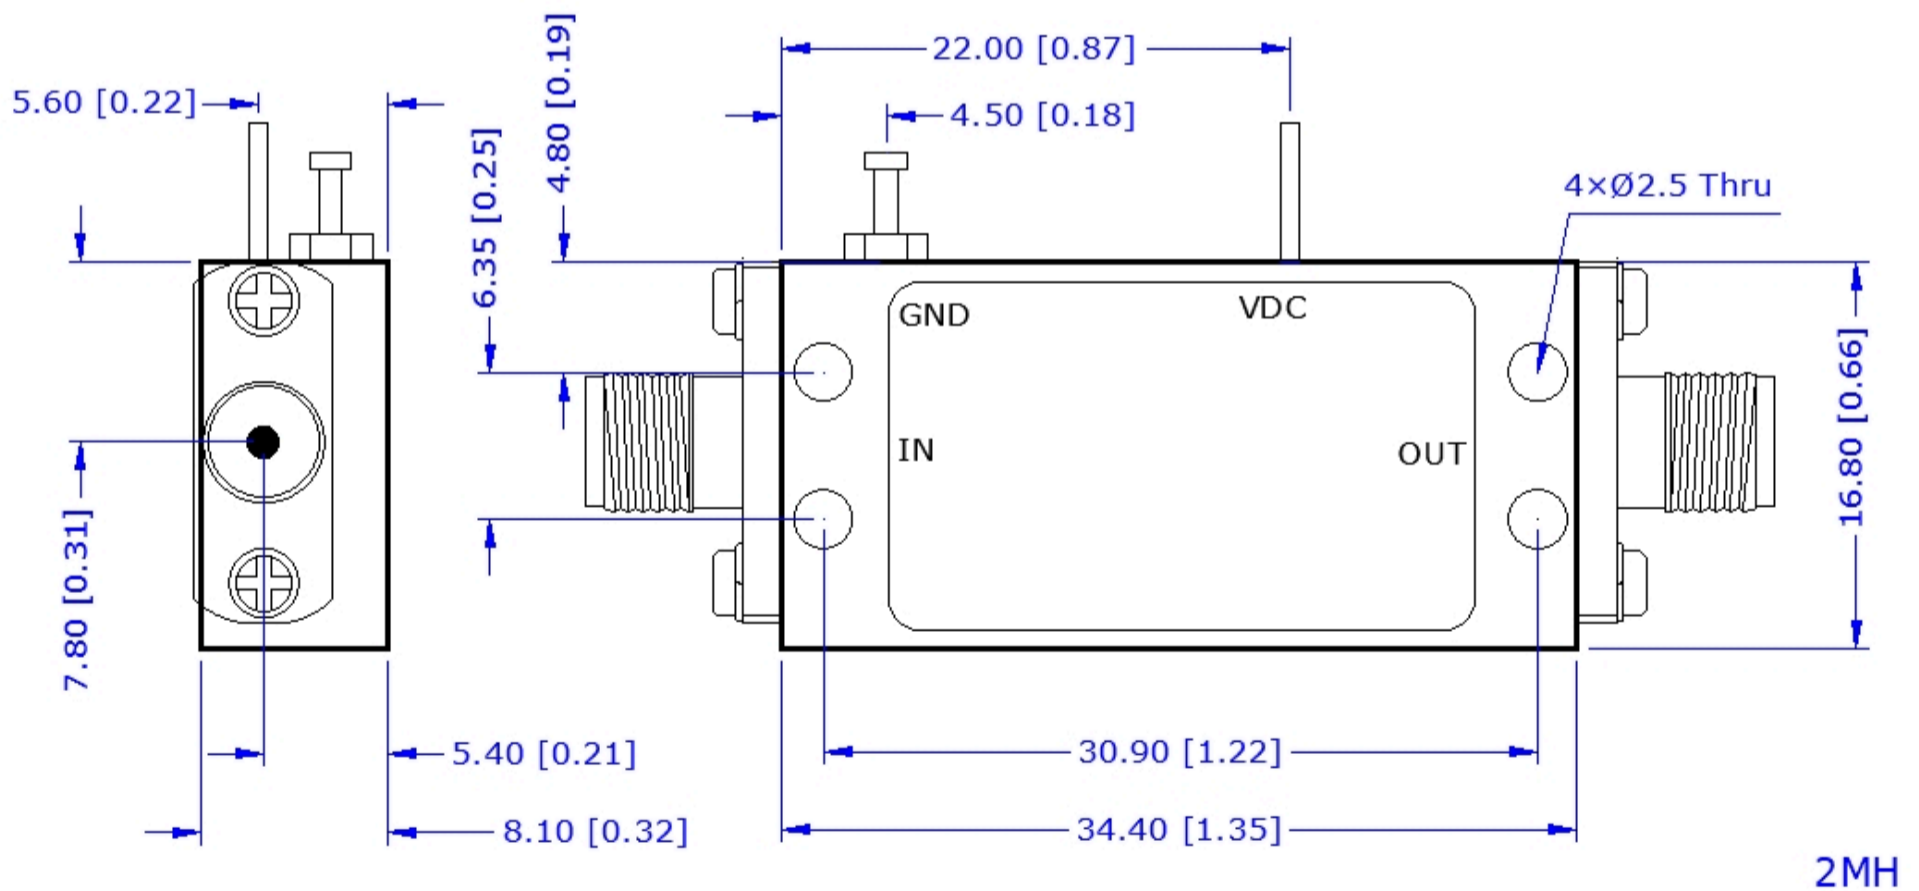

Dimensions are in mm [Inches]  
Tolerances : Outline drawing: ±0.2 [0.008]  
Hole: ±0.2 [0.008]

Input Port VSWR

Output Port VSWR

Output Port Insertion Loss

Output Port Isolation

Amplitude Balance

Phase Balance