

Features

- Design : Wilkinson
- Stainless Steel Connectors
- Low Insertion Loss 0.25dB
- RoHS and REACH Compliant
- High Isolation 20dB

Electrical Specifications

| Description | Units | Minimum | Typical | Maximum |
|-----------------------|-------|---------|---------|---------|
| Freq. Range | GHz | 2 | | 2.4 |
| Nominal Splitter Loss | dB | | 3.0 | |
| Insertion Loss | dB | | 0.2 | 0.25 |
| Input VSWR | | | 1.2 | 1.25 |
| Output VSWR | | | 1.2 | 1.2 |
| Amplitude Balance | dB | | 0.1 | 0.2 |
| Phase Balance | deg | | 1 | 2 |
| Isolation | dB | 20 | 23 | |
| Forward Power | W | | | 30 |
| Reverse Power | W | | | 2 |
| Peak Power | KW | | | 0.1 |
| Impedance | Ohms | | 50 | |
| Operating Temp. | °C | -45 | | +85 |

Special Requirements

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- All output ports /power combiner in-amplitude (0dB difference) ;
- All output ports /power combiner in-phase (0° difference) ;


Mechanical Specifications

| | |
|-------------------|----------------------------|
| Dimension L*W*H | 28*28*12.7 mm |
| Input Connector | SMA-Female Stainless Steel |
| Output Connectors | SMA-Female Stainless Steel |
| Weight | 25 g |
| Finishing | Paint Black |
| Environment | Nominal |

Compliance Certifications

| | |
|-----------------|---|
| RoHS Compliant | ✓ |
| REACH Compliant | ✓ |

CAD Drawing

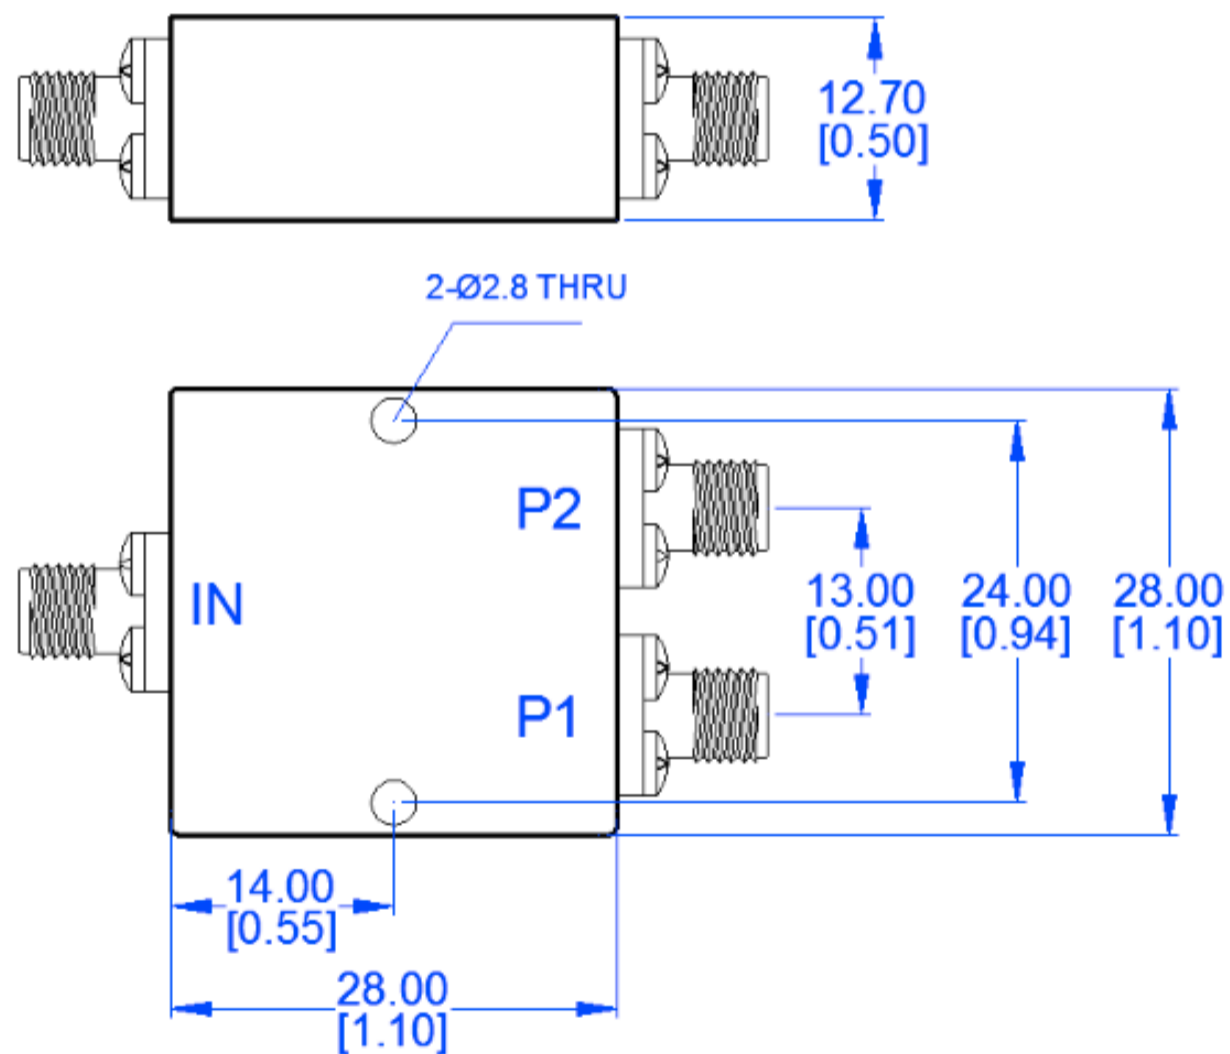

Dimensions are in mm [Inches]
 Tolerances : Outline drawing: ±0.2 [0.008]
 Hole: ±0.2 [0.008]