

## Features

- Design : Wilkinson
- Stainless Steel Connectors
- Low Insertion Loss 0.5dB
- RoHS and REACH Compliant
- High Isolation 22dB

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	7.9		9.4
Nominal Splitter Loss	dB		3.0	
Insertion Loss	dB			0.5
Input VSWR				1.2
Output VSWR				1.1
Amplitude Balance	dB			0.2
Phase Balance	deg			3
Isolation	dB	22		
Forward Power	W			30
Reverse Power	W			2
Peak Power	KW			0.1
Impedance	Ohms		50	
Operating Temp.	°C	-45		+85

## Special Requirements

Provide ambient and temp. report including : ( IL. ,VSWR , Amplitude Bal. and Phase Bal. )

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- All output ports /power combiner in-amplitude (0dB difference) ;
- All output ports /power combiner in-phase (0° difference) ;


**Mechanical Specifications**

Dimension L*W*H	32*17*12.7 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Male Stainless Steel
Weight	TBD g
Finishing	Paint Black
Environment	Nominal

**Compliance Certifications**

RoHS Compliant	✓
REACH Compliant	✓

**CAD Drawing**

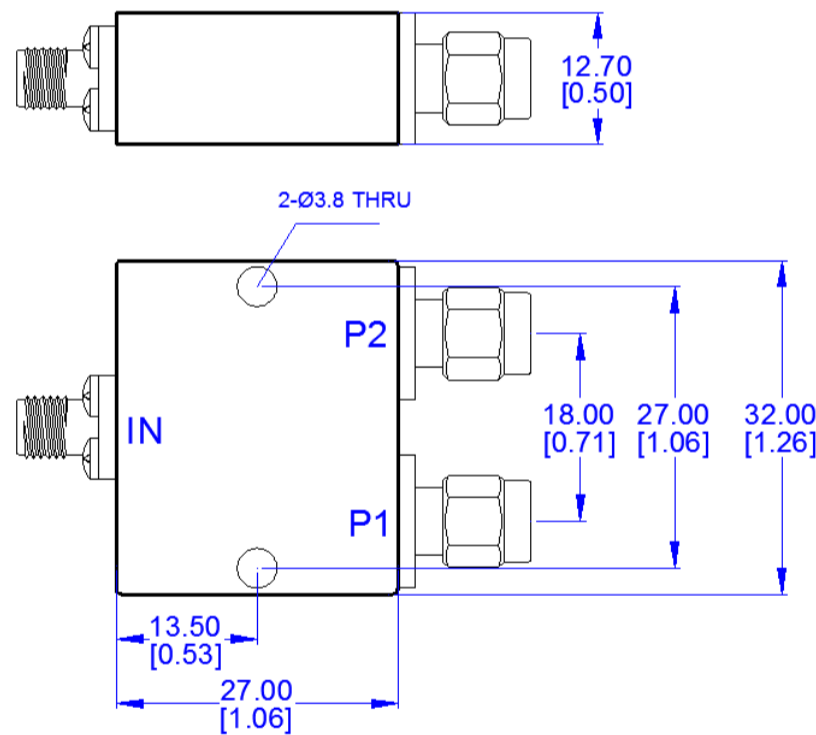

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing: ±0.2 [0.008]  
 Hole: ±0.2 [0.008]