

## Features

- Design : Wilkinson
- Stainless Steel Connectors
- Low Insertion Loss 3.0dB
- RoHS and REACH Compliant
- High Isolation 18dB

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	0.5		6
Nominal Splitter Loss	dB		9.0	
Insertion Loss	dB			3.0
Input VSWR				1.6
Output VSWR				1.4
Amplitude Balance	dB			0.8
Phase Balance	deg			12
Isolation	dB	18		
Forward Power	W			30
Reverse Power	W			1
Peak Power	KW			0.1
Impedance	Ohms		50	
Operating Temp.	°C	-45		+85

## Special Requirements

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- All output ports /power combiner in-amplitude (0dB difference) ;
- All output ports /power combiner in-phase (0° difference) ;


## Mechanical Specifications

Dimension L*W*H	108*89*12.7 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	310 g
Finishing	Paint Black
Environment	Nominal

## Compliance Certifications

RoHS Compliant	✓
REACH Compliant	✓

## CAD Drawing

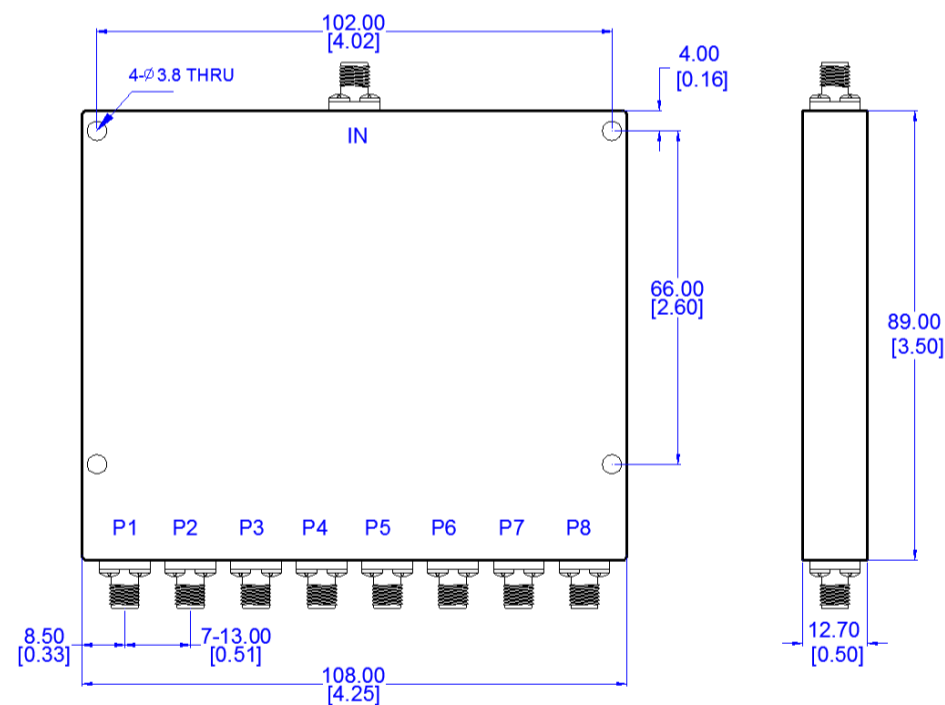

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing:  $\pm 0.2$  [0.008]  
 Hole:  $\pm 0.2$  [0.008]