

Features

- Design : Suspended Stripline
- Ni Plating Connectors
- Low Insertion Loss 0.8 dB
- High Rejection
- RoHS and REACH Compliant

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	1.5	2	2.5
Bandwidth@0.8dB	MHz		1000	
Insertion Loss	dB			0.8
Ripple	dB			0.6
Return Loss	dB	13.98		
Group delay	ns			-
Group Delay Variation	ns			
Phase Linearity	deg			-
Amplitude Matching	dB			-
Rejection	dB	90@0.8GHz	90@4.5-5GHz	
Power	W			5
Operating Temp.	°C	-10		+30

Special Requirements

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Relative Humidity 5 to 95% at +25°C ;


Mechanical Specifications

Dimension L*W*H	35*20*20 mm
Input Connector	N-Female Ni Plating
Output Connectors	N-Female Ni Plating
Weight	TBD g
Finishing	Paint Black
Environment	X

Compliance Certifications

RoHS Compliant	✓
REACH Compliant	✓

CAD Drawing

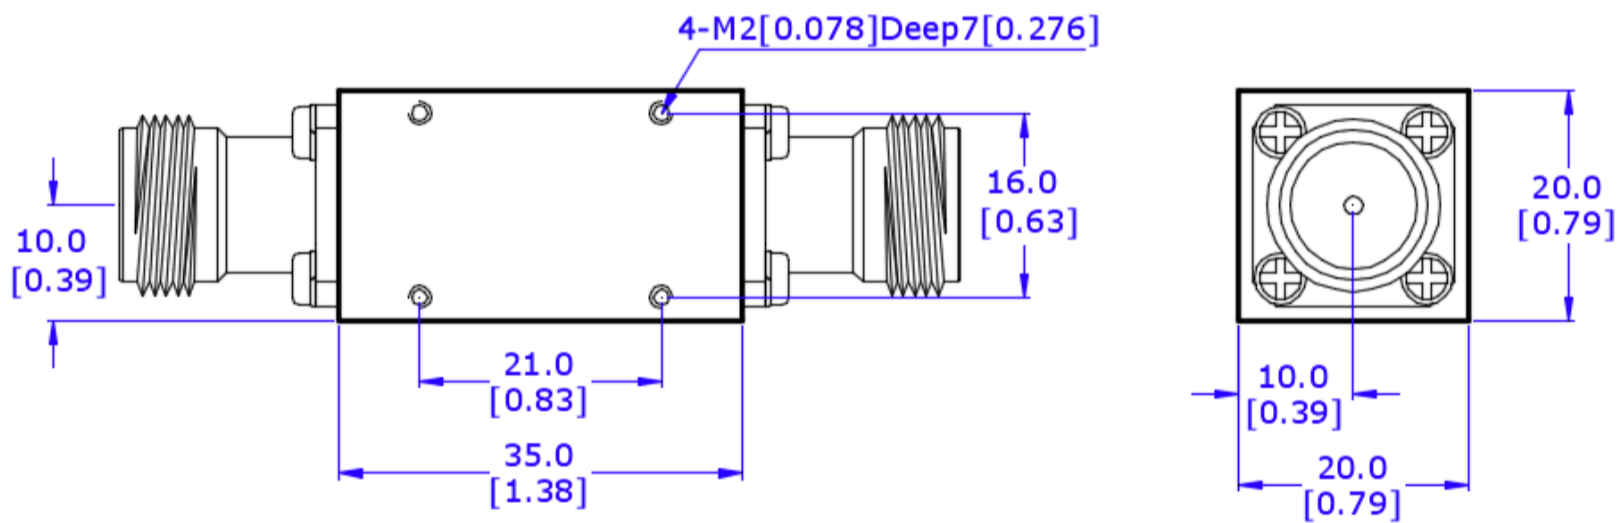

Dimensions are in mm [Inches]
 Tolerances : Outline drawing: ±0.2 [0.008]
 Hole: ±0.2 [0.008]