

Features

- Design : Cavity
- Stainless Steel Connectors
- Low Insertion Loss 2.0 dB
- High Rejection
- RoHS and REACH Compliant

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	4	5	6
Bandwidth	MHz		2000	
Insertion Loss	dB			2.0
Ripple	dB			1.0
Return Loss	dB	10.9		
Group delay	ns			-
Group Delay Variation	ns			±10
Phase Linearity	deg			-
Amplitude Matching	dB			-
Rejection	dB	20@ 3000-3800MHz	70@ DC-3000MHz 70@ 7500MHz	
Power	W			10
Operating Temp.	°C	-40		+70

Special Requirements

Group Delay Ripple: 20ns Max ; Input and Output connector removable

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Relative Humidity 5 to 95% at +25°C ;


Mechanical Specifications

Dimension L*W*H	74*27*10 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	95 g
Finishing	Paint Black
Environment	X

Compliance Certifications

RoHS Compliant	✓
REACH Compliant	✓

CAD Drawing

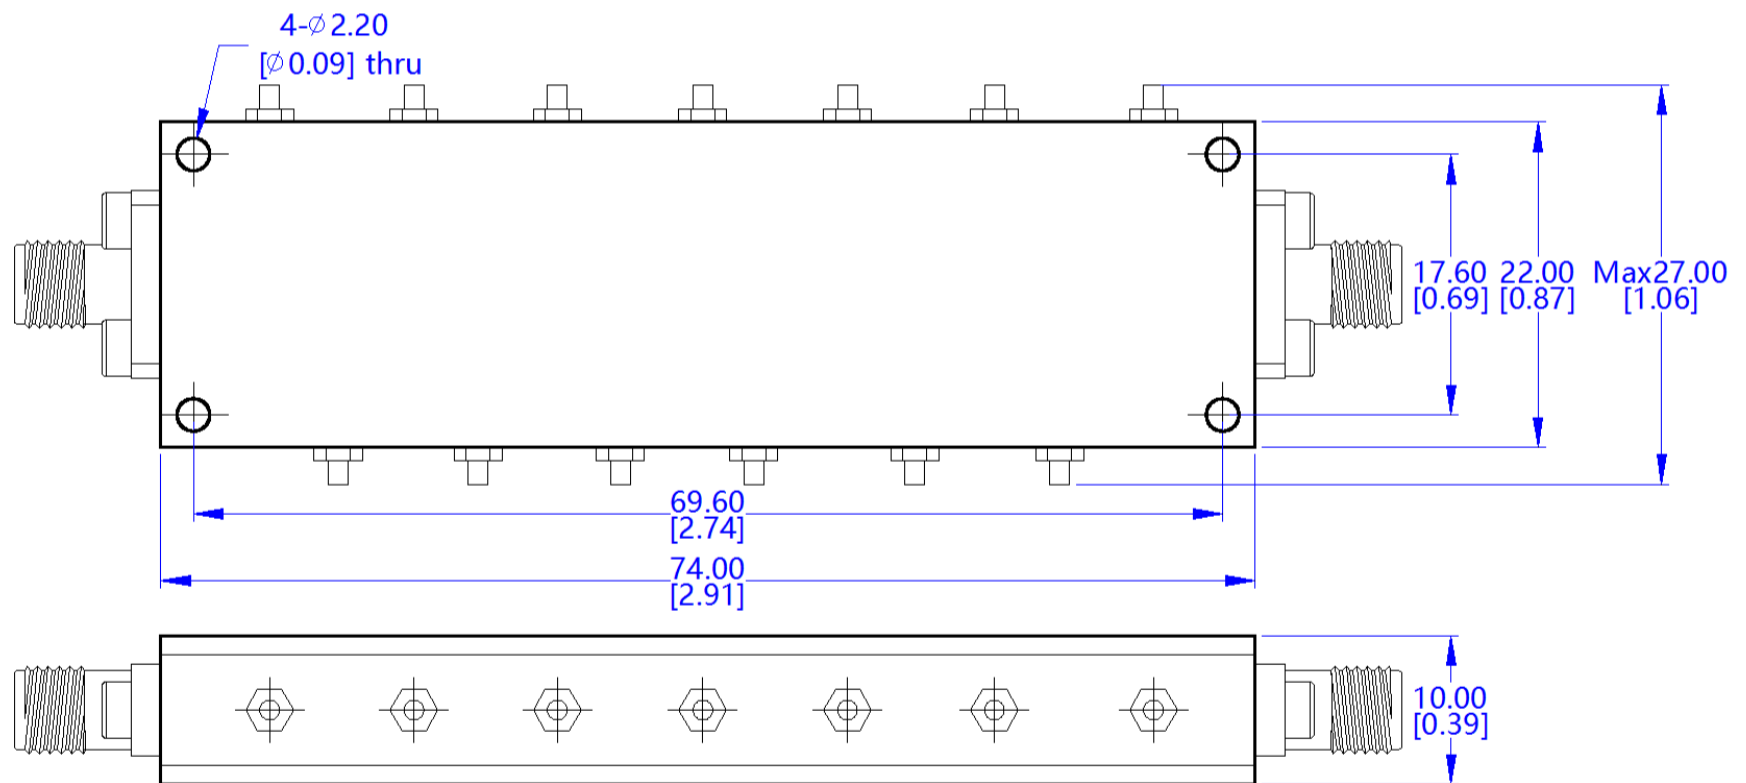

Dimensions are in mm [Inches]
 Tolerances : Outline drawing: ±0.2 [0.008]
 Hole: ±0.2 [0.008]