

## Features

- Design : SP8T Absorptive
- Ultra Wide Band
- Low Insertion Loss 1.7 dB
- Fast Switching Speed
- RoHS and REACH Compliant

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	1		2
Input Power	W		1	
Insertion Loss	dB		1.2	1.7
VSWR	:1		1.5	1.8
Isolation	dB	80		
Switching speed	nsec			120
Rise / Fall time	nsec			
DC Biasing (+5V)	mA		400	
DC Biasing (-5V)	mA		50	
Control Interface			PIN	
Control Type			TTL	
Impedance	Ohms		50	
Operating Temp.	°C	-45		+85

## Special Requirements

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Switching speed is 50% TTL to 90% RF ( T- ON ) and 50% TTL to 10% RF ( T- OFF ) ;
- Rise / Fall time : 10% RF to 90% RF and 90% RF to 10% RF ;

## Mechanical Specifications


Dimension L*W*H	104*24*10.2 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	65 g
Finishing	Nickel Plated
Environment	Nominal
RoHS / REACH Compliant	✓

## Truth Table

Control Input TTL			Signal Path State
E3	E2	E1	
0	0	0	J0-J1
0	0	1	J0-J2
0	1	0	J0-J3
0	1	1	J0-J4
1	0	0	J0-J5
1	0	1	J0-J6
1	1	0	J0-J7
1	1	1	J0-J8

- TTL Control Voltage : High ( 1 ) : 2.8 to 5V
- TTL Control Voltage : Low ( 0 ) : 0 to 0.8V
- Low Power cold Switching

## CAD Drawing

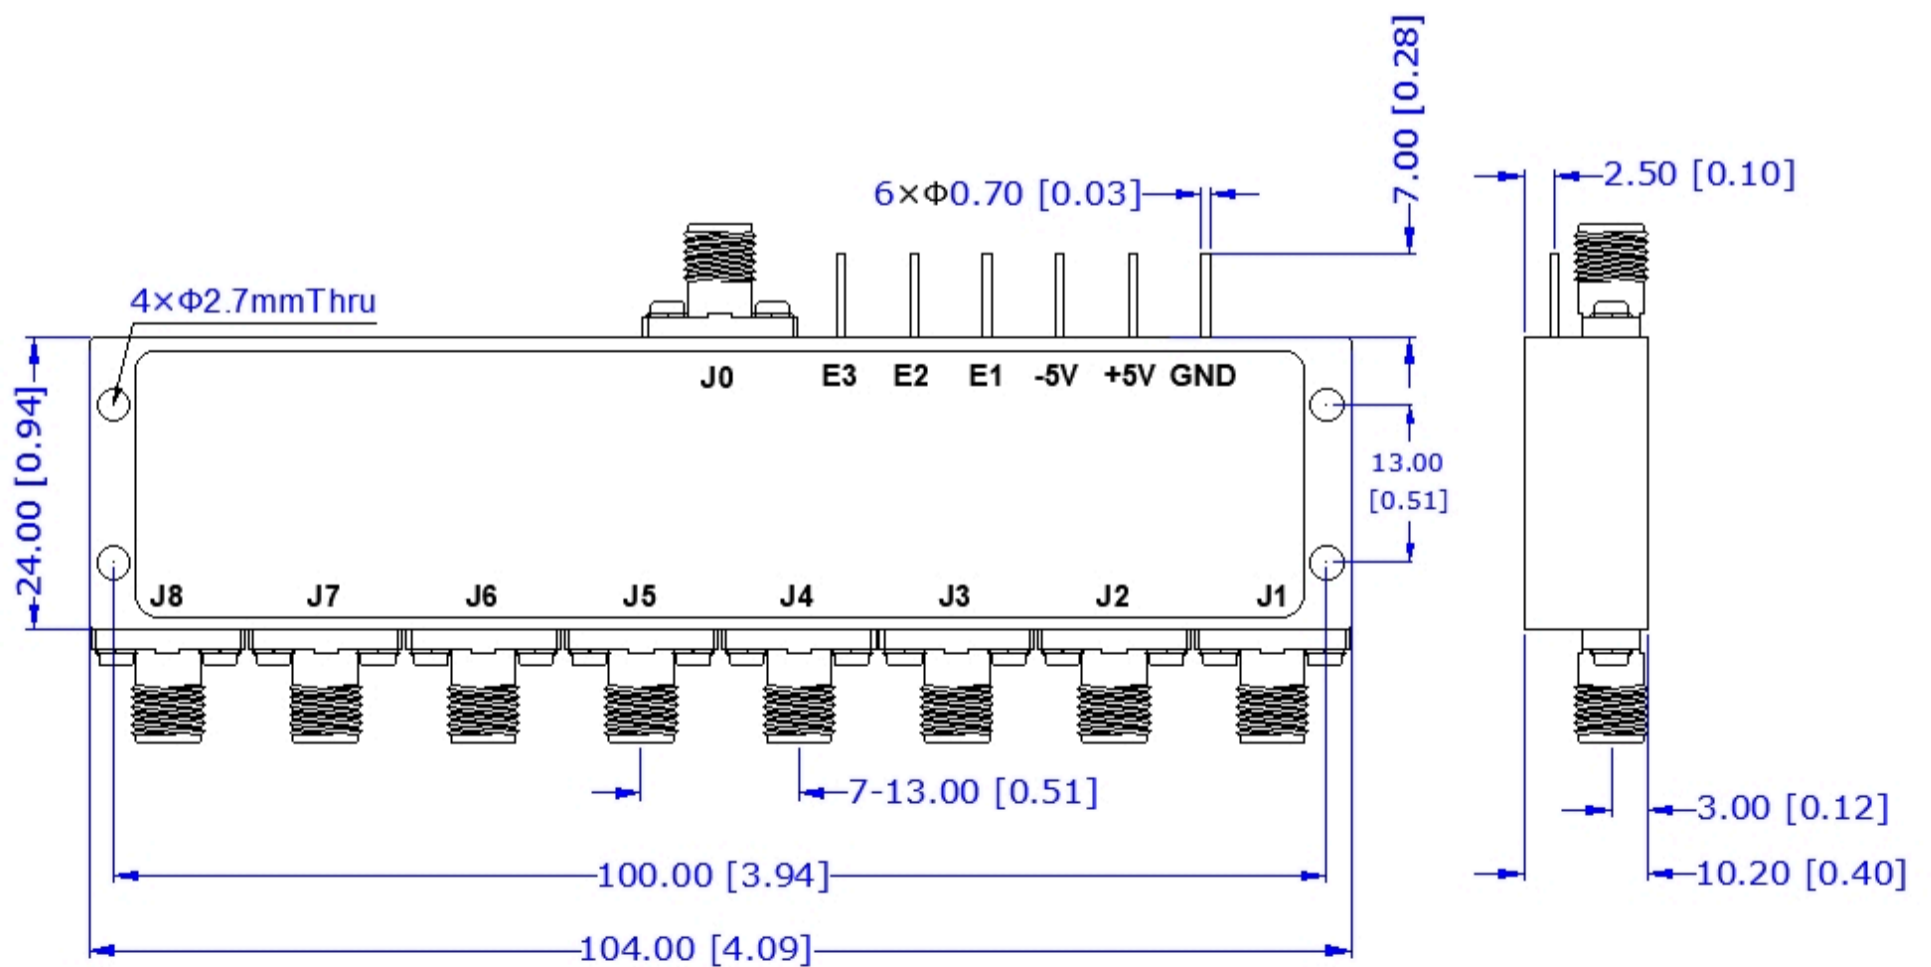

8TA01