

Features

- Design : SP8T Absorptive
- Ultra Wide Band
- Low Insertion Loss 3.2 dB
- Fast Switching Speed
- RoHS and REACH Compliant

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	0		4.5
Input Power	W		1	
Insertion Loss	dB			3.2
VSWR	:1			2
Isolation	dB	80		
Switching speed	nsec			500
Rise / Fall time	nsec			-
DC Biasing (+5V)	mA		400	
DC Biasing (-5V)	mA		50	
Control Interface			PIN	
Control Type			TTL	
Impedance	Ohms		50	
Operating Temp.	°C	-45		+85

Special Requirements

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Switching speed is 50% TTL to 90% RF (T- ON) and 50% TTL to 10% RF (T- OFF) ;
- Rise / Fall time : 10% RF to 90% RF and 90% RF to 10% RF ;

Mechanical Specifications


Dimension L*W*H	105*38*10.2 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	100 g
Finishing	Gold Plated
Environment	Nominal
RoHS / REACH Compliant	✓

Truth Table


Control Input TTL								Signal Path State
E8	E7	E6	E5	E4	E3	E2	E1	
1	1	1	1	1	1	1	0	J0-J1
1	1	1	1	1	1	0	1	J0-J2
1	1	1	1	1	0	1	1	J0-J3
1	1	1	1	0	1	1	1	J0-J4
1	1	1	0	1	1	1	1	J0-J5
1	1	0	1	1	1	1	1	J0-J6
1	0	1	1	1	1	1	1	J0-J7
0	1	1	1	1	1	1	1	J0-J8

- TTL Control Voltage : High (1) : 2.8 to 5V
- TTL Control Voltage : Low (0) : 0 to 0.8V
- Low Power cold Switching


CAD Drawing

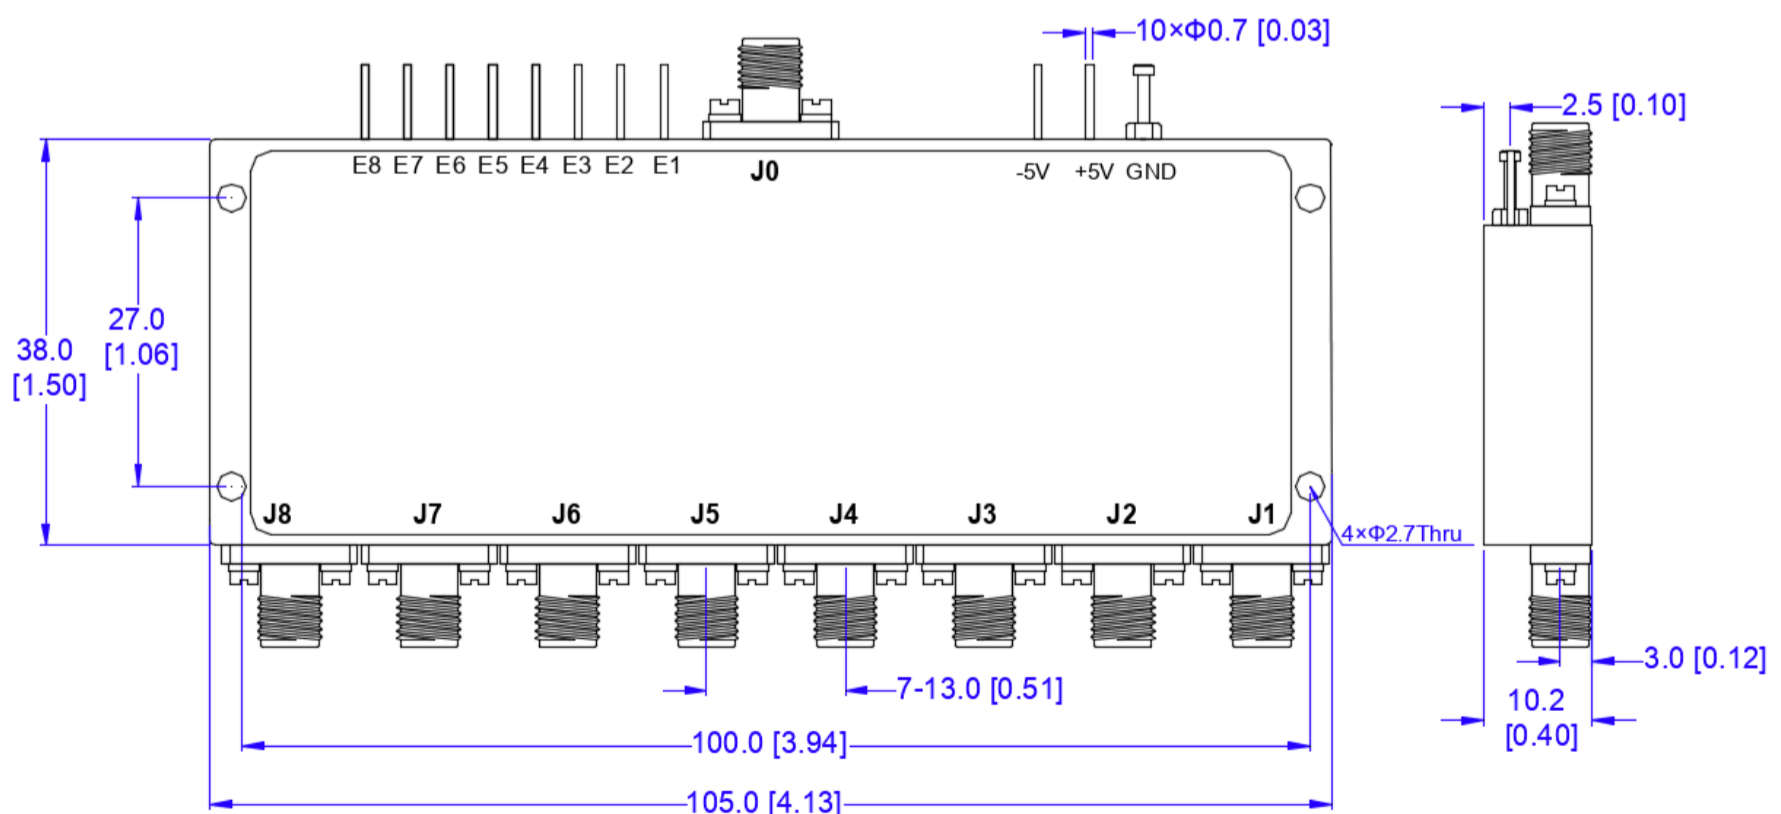


J0 - J1

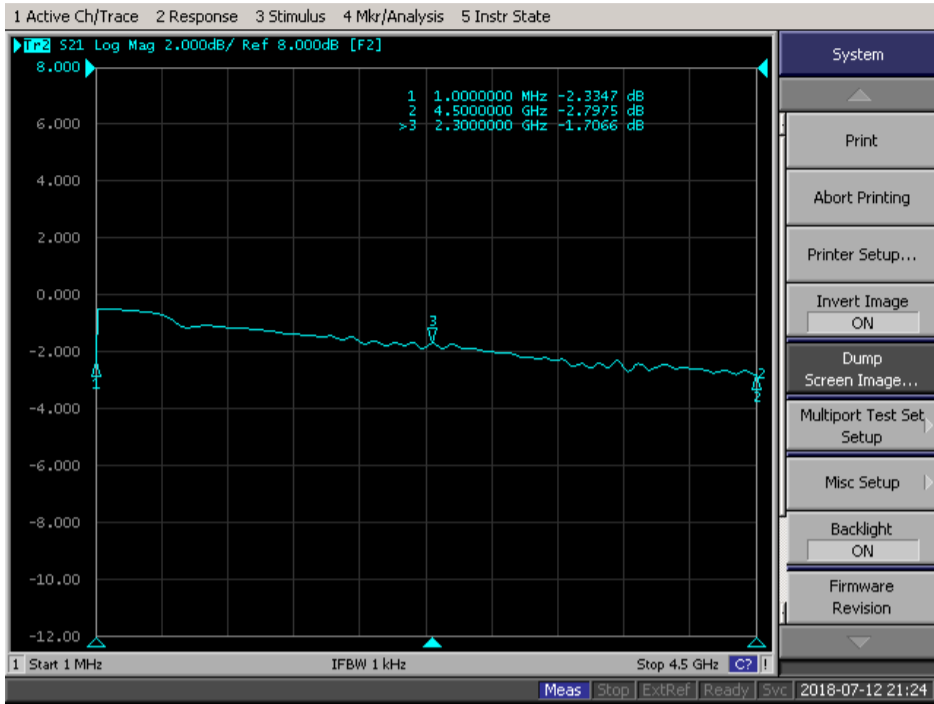


J1 Isolation

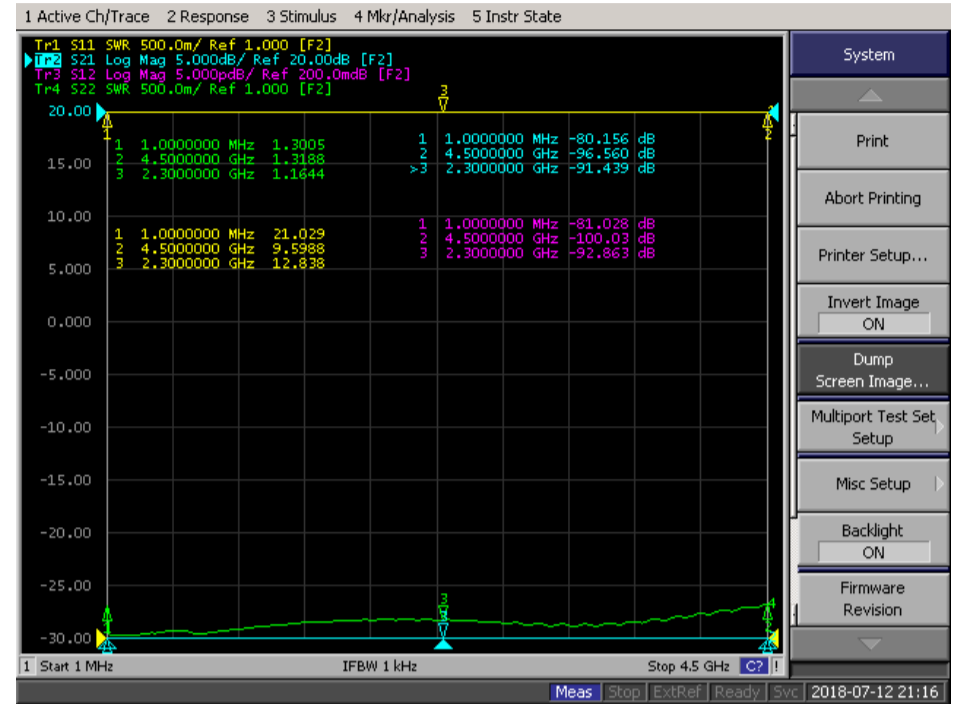


J0 - J2

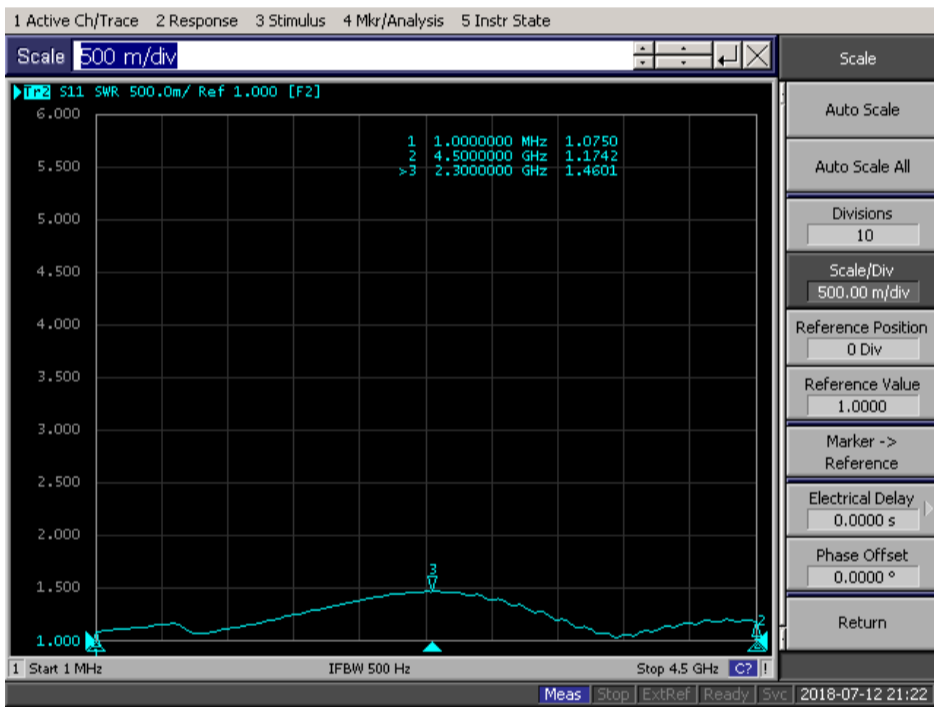

J2 Isolation

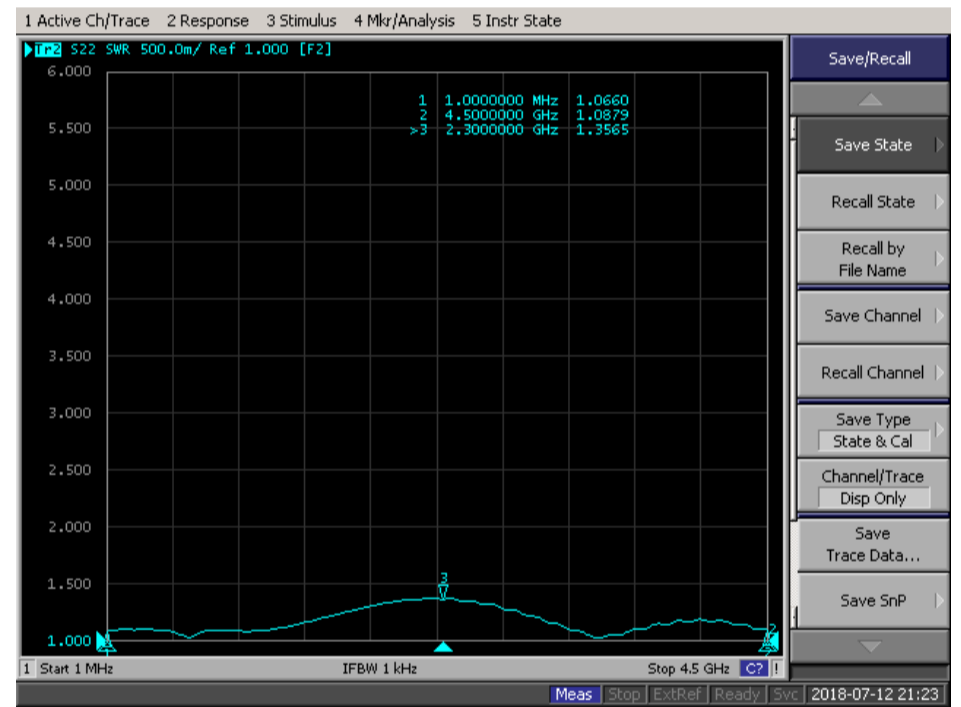

Turn On Switching Speed

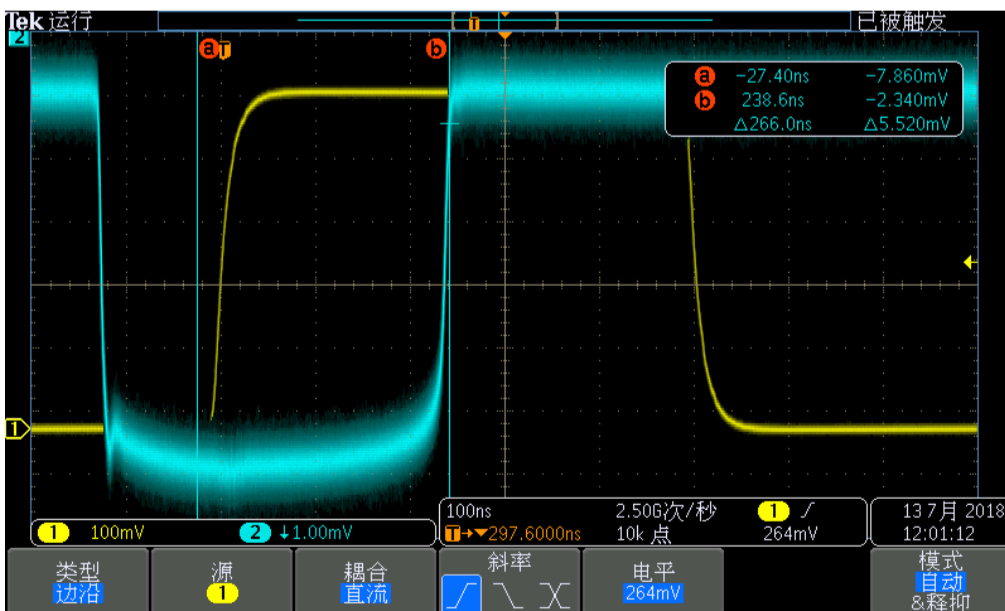

Turn Off Switching Speed

