

Features

- Low Phase Balance 16dB
- Low Insertion Loss 2.2dB
- Low Amplitude Balance 1.4dB
- RoHS and REACH Compliant
- High Isolation 13dB

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	25		40
Phase Difference	deg		90	
Insertion Loss	dB			2.2
VSWR				1.7
Amplitude Balance	dB			1.4
Phase Balance	deg			16
Isolation	dB	13		
Input Power (CW)	W			20
Input Power (Peak)	KW			3
Impedance	Ohms		50	
Operating Temp.	°C	-40		+70

Special Requirements

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Insertion Loss : Excludes Coupling loss insertion loss ;
- Relative Humidity 5 to 95% ;


Mechanical Specifications

Dimension L*W*H	21.9*43.7*12.7 mm
Input Connector	2.92mm-Female
Output Connectors	2.92mm-Female
Weight	50 g
Finishing	[F8YL9F8]
Environment	+70

Compliance Certifications

RoHS Compliant	Nominal
REACH Compliant	Nominal

CAD Drawing

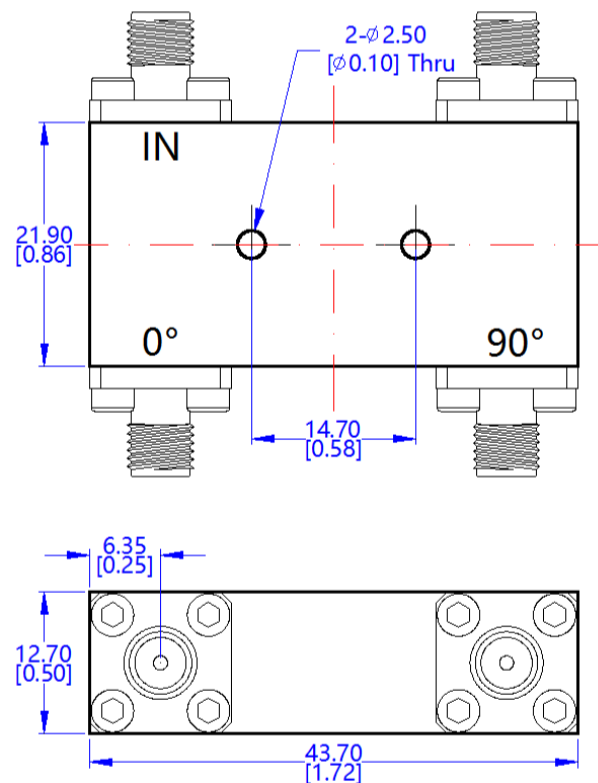

Dimensions are in mm [Inches]
Tolerances : Outline drawing: ±0.2 [0.008]
Hole: ±0.2 [0.008]