

Features

- Small Signal Gain 31dB
- Low Gain Flatness
- Input VSWR 2.0
- Output Power 37dBm
- RoHS and REACH Compliant

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	8.2		12.4
Small Signal Gain	dB	31		
Gain Flatness	dB		±2.5	-
Noise figure	dB		-	
Output Power @P1dB	dBm	37		
Input VSWR	: 1			2.0
Output VSWR	: 1			2.5
OIP3	dBm		-	
Reverse Isolation	dB	-		
Spurious	dBc	-		
Harmonics	dBc			
TTL Control				
TTL Switching Time	us		-	
Supply Current (Vcc=+12V)	mA		7000	
Operating Temp.	°C	-40		+60

Special Requirements

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- ESD sensitive material , Transport material in approved ESD bags. Handle only in approved ESD workstation;
- Providing effective cooling measures and electrostatic protection;
- If the product is damaged due to over-drive, no-load, over-temperature, over-current and static electricity in use. Customer needs to pay for the cost of maintenance.


Mechanical Specifications

Dimension L*W*H	55.88*43.18*15.24 mm
Input Connector	SMA-Female Stainless Steel
Output Connector	SMA-Female Stainless Steel
Weight	TBD g
Finishing	Nickel Plated
Environment	X

Compliance Certifications

RoHS Compliant	✓
REACH Compliant	✓

CAD Drawing

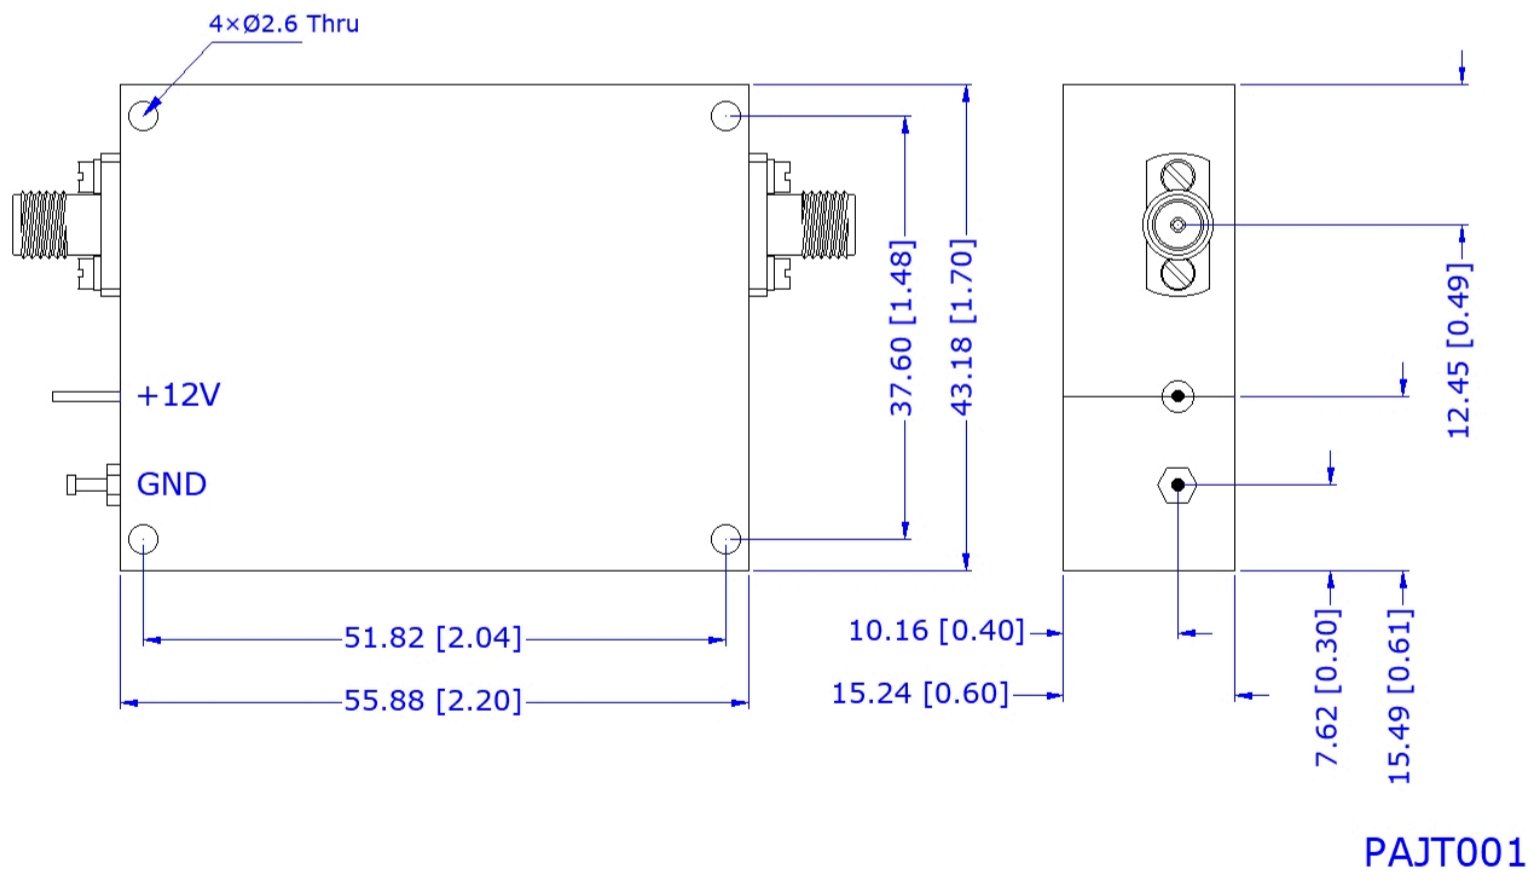

Dimensions are in mm [Inches]
Tolerances : Outline drawing: ±0.2 [0.008]
Hole: ±0.2 [0.008]