

## Features

- Design : Cavity
- Stainless Steel Connectors
- Low Insertion Loss 2.0 dB
- High Rejection
- RoHS and REACH Compliant

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Freq. Range	GHz	26	26.5	27
Bandwidth@-3dB	MHz		1000	
Insertion Loss	dB			2.0
Ripple	dB			1.0
Return Loss	dB	13.98		
Group delay	ns			-
Group Delay Variation	ns			-
Phase Linearity	deg			±10
Amplitude Matching	dB			-
Rejection	dB	45@DC-24.5GHz	45@28.5-26.75GHz	
Power	W			1
Operating Temp.	°C	-45		+85

## Special Requirements

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Relative Humidity 5 to 95% at +25°C ;


**Mechanical Specifications**

Dimension L*W*H	28*16*6.5 mm
Input Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	TBD g
Finishing	Paint Black
Environment	X

**Compliance Certifications**

RoHS Compliant	✓
REACH Compliant	✓

**CAD Drawing**

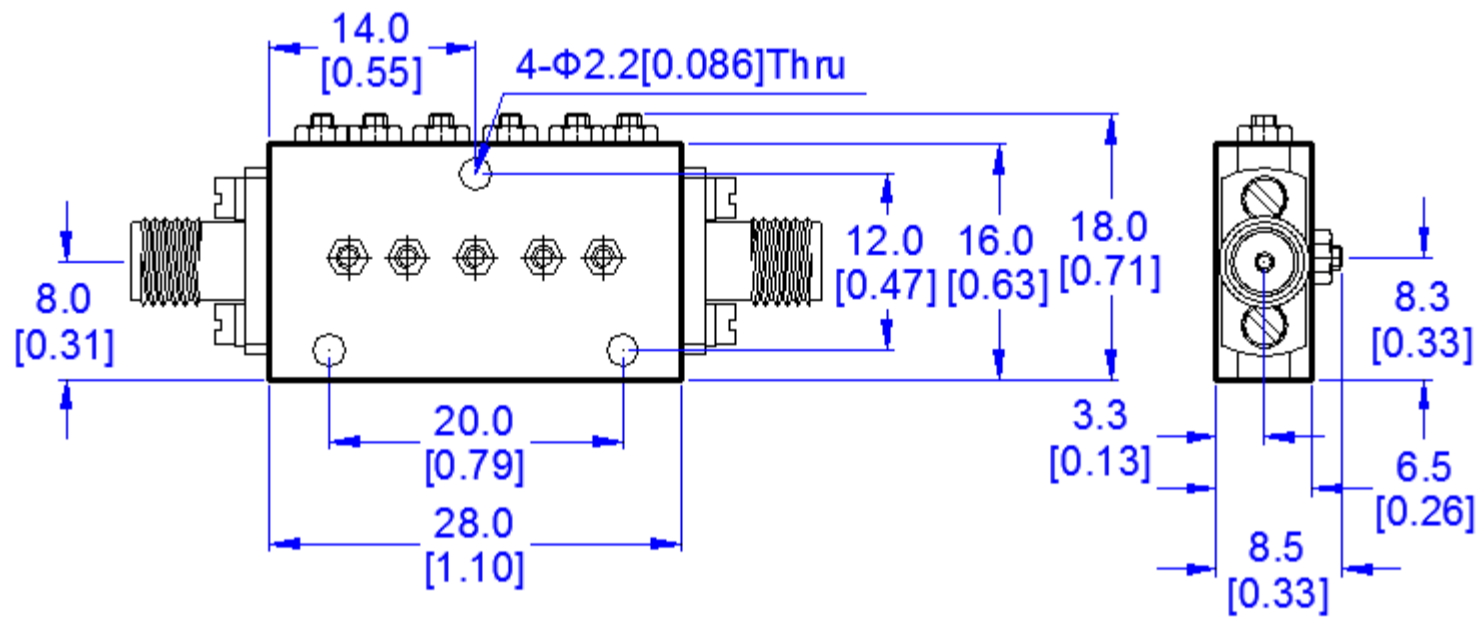

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing: ±0.2 [0.008]  
 Hole: ±0.2 [0.008]