

Features

- Design : SPDT Reflective
- Ultra Wide Band
- Low Insertion Loss 2.8 dB
- Fast Switching Speed
- RoHS and REACH Compliant

Electrical Specifications

| Description | Units | Minimum | Typical | Maximum |
|-------------------|-------|---------|---------|---------|
| Freq. Range | GHz | 6 | | 18 |
| Input Power | W | | 1 | |
| Insertion Loss | dB | | 2.2 | 2.8 |
| VSWR | :1 | | 1.7 | 2 |
| Isolation | dB | 60 | 70 | |
| Switching speed | nsec | | | 100 |
| Rise / Fall time | nsec | | | |
| DC Biasing (+5V) | mA | | 100 | |
| DC Biasing (-5V) | mA | | 50 | |
| Control Interface | | | PIN | |
| Control Type | | | TTL | |
| Impedance | Ohms | | 50 | |
| Operating Temp. | °C | -45 | | +85 |

Special Requirements

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- Switching speed is 50% TTL to 90% RF (T- ON) and 50% TTL to 10% RF (T- OFF) ;
- Rise / Fall time : 10% RF to 90% RF and 90% RF to 10% RF ;

Mechanical Specifications


| | |
|------------------------|----------------------------|
| Dimension L*W*H | 25*17.5*10.2 mm |
| Input Connector | SMA-Female Stainless Steel |
| Output Connectors | SMA-Female Stainless Steel |
| Weight | 15 g |
| Finishing | Nickel Plated |
| Environment | Nominal |
| RoHS / REACH Compliant | ✓ |

Truth Table

| Control Input TTL E1 or TTL | Signal Path State |
|--------------------------------|-------------------|
| 0 | J0-J1 |
| 1 | J0-J2 |

- TTL Control Voltage : High (1) : 2.8 to 5V
- TTL Control Voltage : Low (0) : 0 to 0.8V
- Low Power cold Switching

CAD Drawing

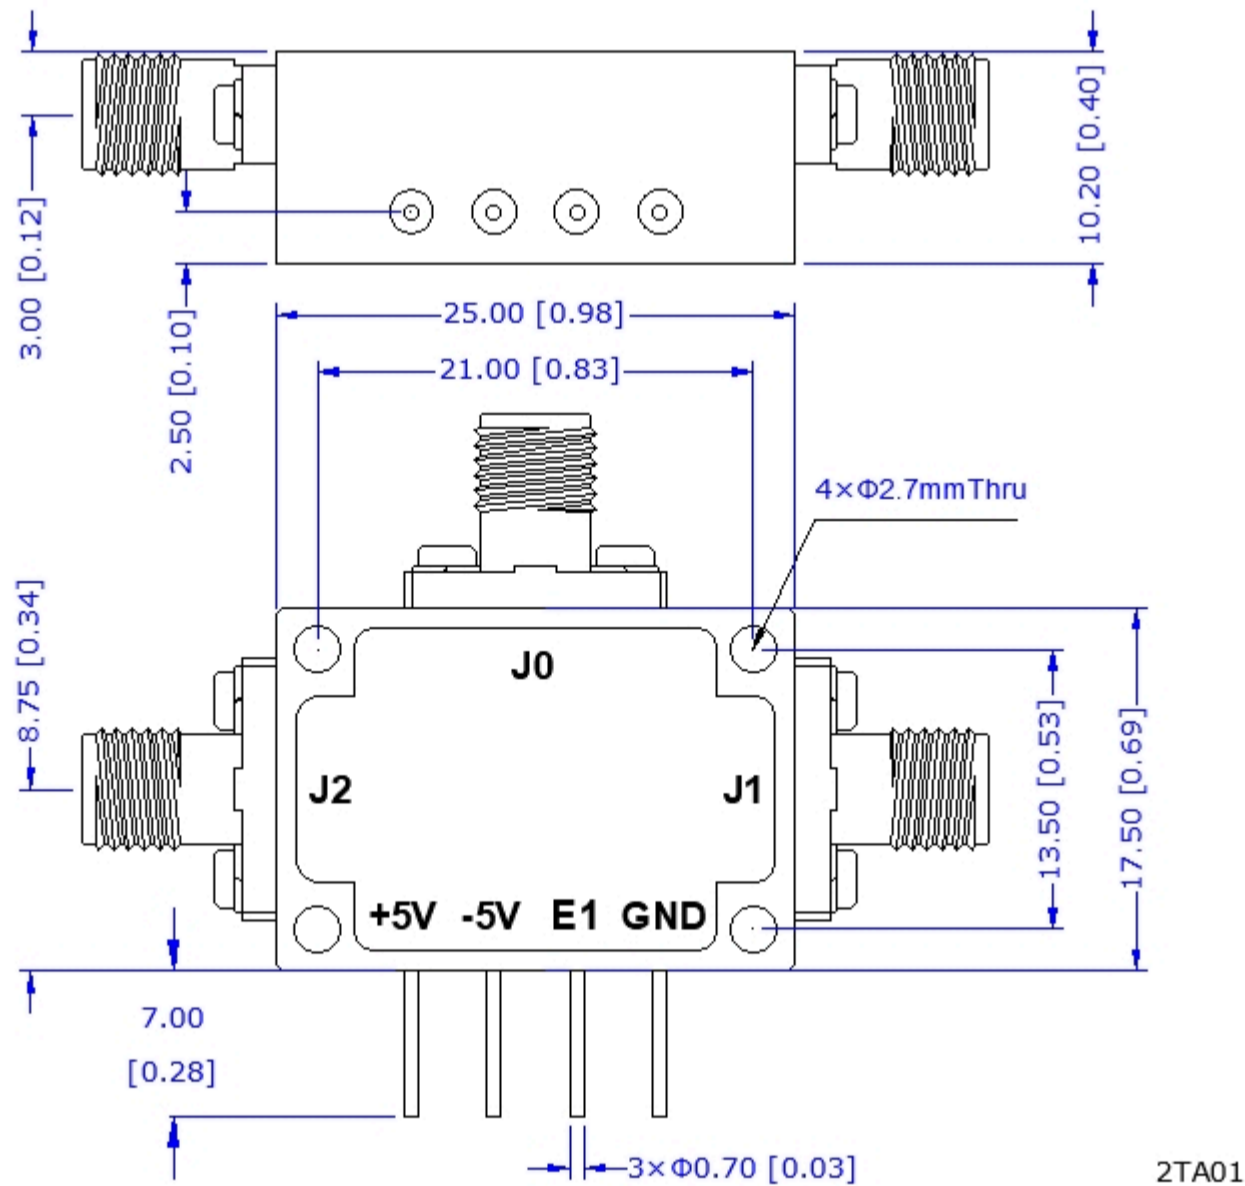

Dimensions are in mm [Inches]
 Tolerances : Outline drawing: ±0.2 [0.008]
 Hole: ±0.2 [0.008]