

## Features

- Output Freq. : 3.97 GHz
- Output Power : 13 dBm
- Harmonics : -20 dBc
- Spurious : -80 dBc
- RoHS and REACH Compliant

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Output Frequency	GHz		3.97	
Freq. Accuracy	ppm		-	
Freq. Stability	ppm/°C			4
Mechanical Tuning	MHz		20	
Output Power	dBm	13		
Power Variation	dB			±2
Phase Noise@10Hz	dBc/Hz			-
Phase Noise@100Hz	dBc/Hz			-
Phase Noise@1KHz	dBc/Hz			-
Phase Noise@10KHz	dBc/Hz			-85
Phase Noise@100KHz	dBc/Hz			-105
Phase Noise@1MHz	dBc/Hz			-115
2nd Harmonics	dBc			-20
Spurious	dBc			-80
Pushing@+12±0.5V	MHz / V			±1
Pulling@VSWR 2.0: 1	MHz			±1
Supply Voltage	V	+12		+15
Current	mA		200	
Operating Temp.	°C	-40		+85

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;


## Mechanical Specifications

Dimension L*W*H	53.34*27.94*13.21 mm
Output Connectors	SMA-Female Stainless Steel
Weight	TBD g
Finishing	Silver Plated

## Compliance Certifications

RoHS Compliant	✓
REACH Compliant	✓

## CAD Drawing

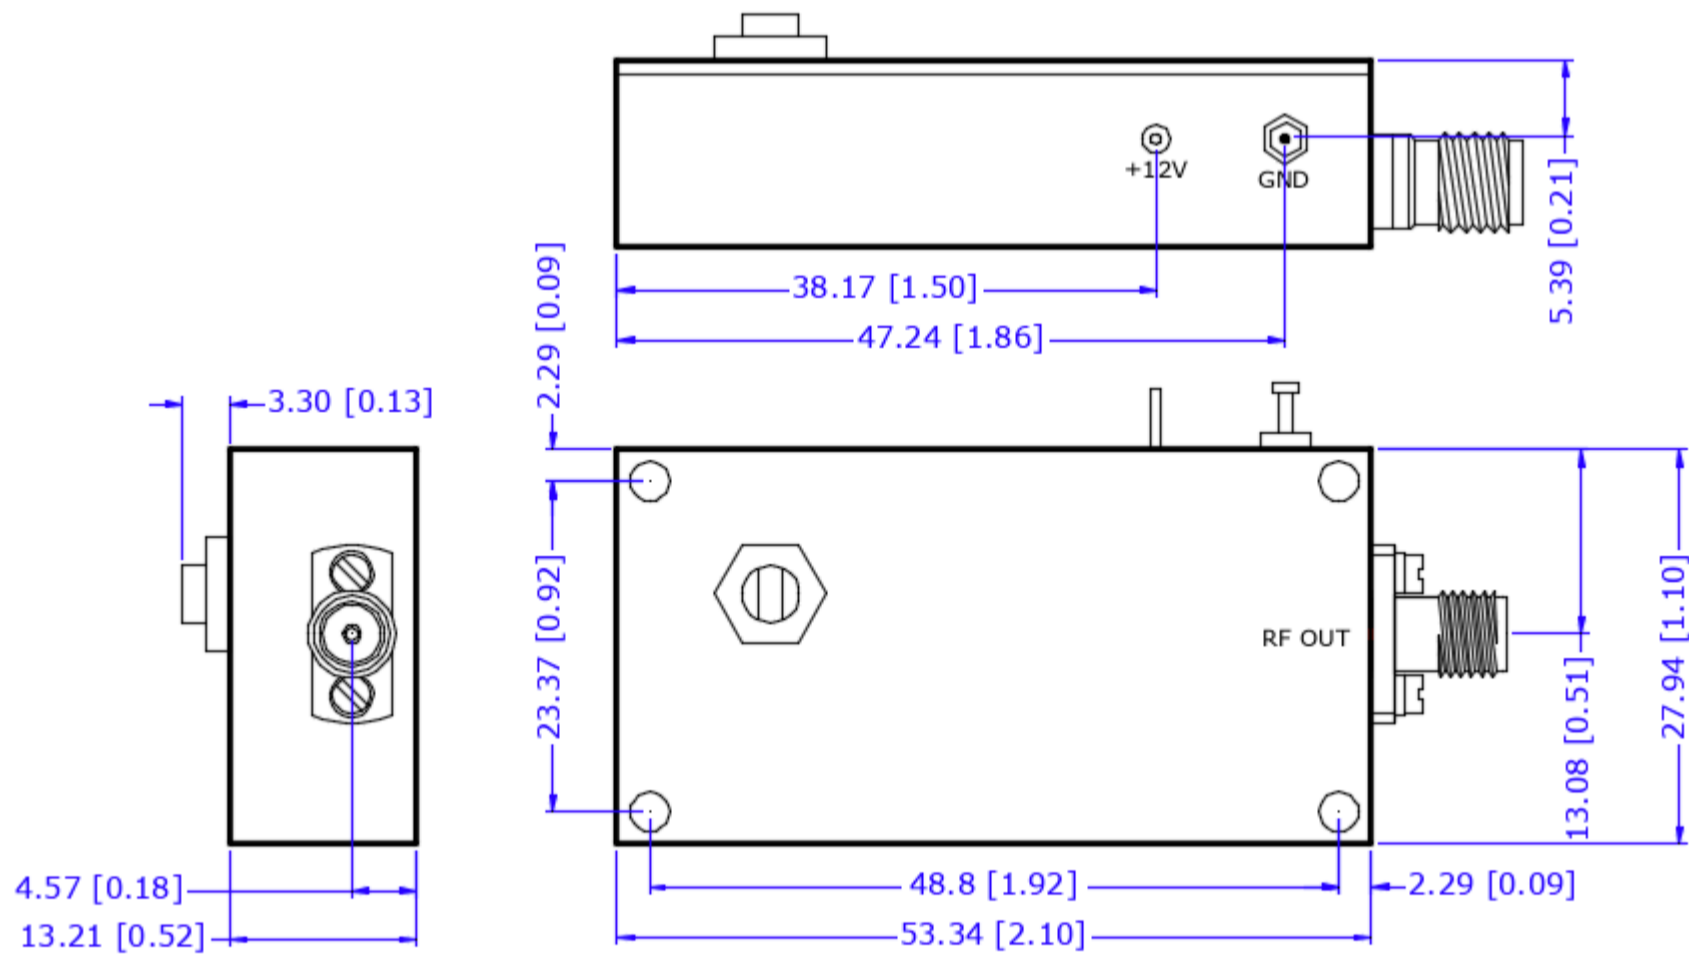

Dimensions are in mm [Inches]  
 Tolerances : Outline drawing:  $\pm 0.2$  [0.008]  
 Hole:  $\pm 0.2$  [0.008]