

Features

- Output Freq. : 9.9 GHz
- Output Power : 13 dBm
- Harmonics : -20 dBc
- Spurious : 70 dBc
- RoHS and REACH Compliant

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Output Frequency	GHz		9.9	
Freq. Accuracy	ppm		-	
Freq. Stability	ppm/°C			5
Mechanical Tuning	MHz		-	
Output Power	dBm	13		
Power Variation	dB			±1.5
Phase Noise@10Hz	dBc/Hz			-
Phase Noise@100Hz	dBc/Hz			-
Phase Noise@1KHz	dBc/Hz			-
Phase Noise@10KHz	dBc/Hz			-85
Phase Noise@100KHz	dBc/Hz			-115
Phase Noise@1MHz	dBc/Hz			-
2nd Harmonics	dBc			-20
Spurious	dBc			70
Pushing@+12±0.5V	MHz / V			±0.3
Pulling@VSWR 2.0: 1	MHz			±1
Supply Voltage	V	+12		+15
Current	mA		80	
Operating Temp.	°C	-40		+70

Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;


Mechanical Specifications

Dimension L*W*H	47×50×15.7 mm
Output Connectors	SMA-Female Stainless Steel
Weight	TBD g
Finishing	Nickel Plated

Compliance Certifications

RoHS Compliant	√
REACH Compliant	√

CAD Drawing

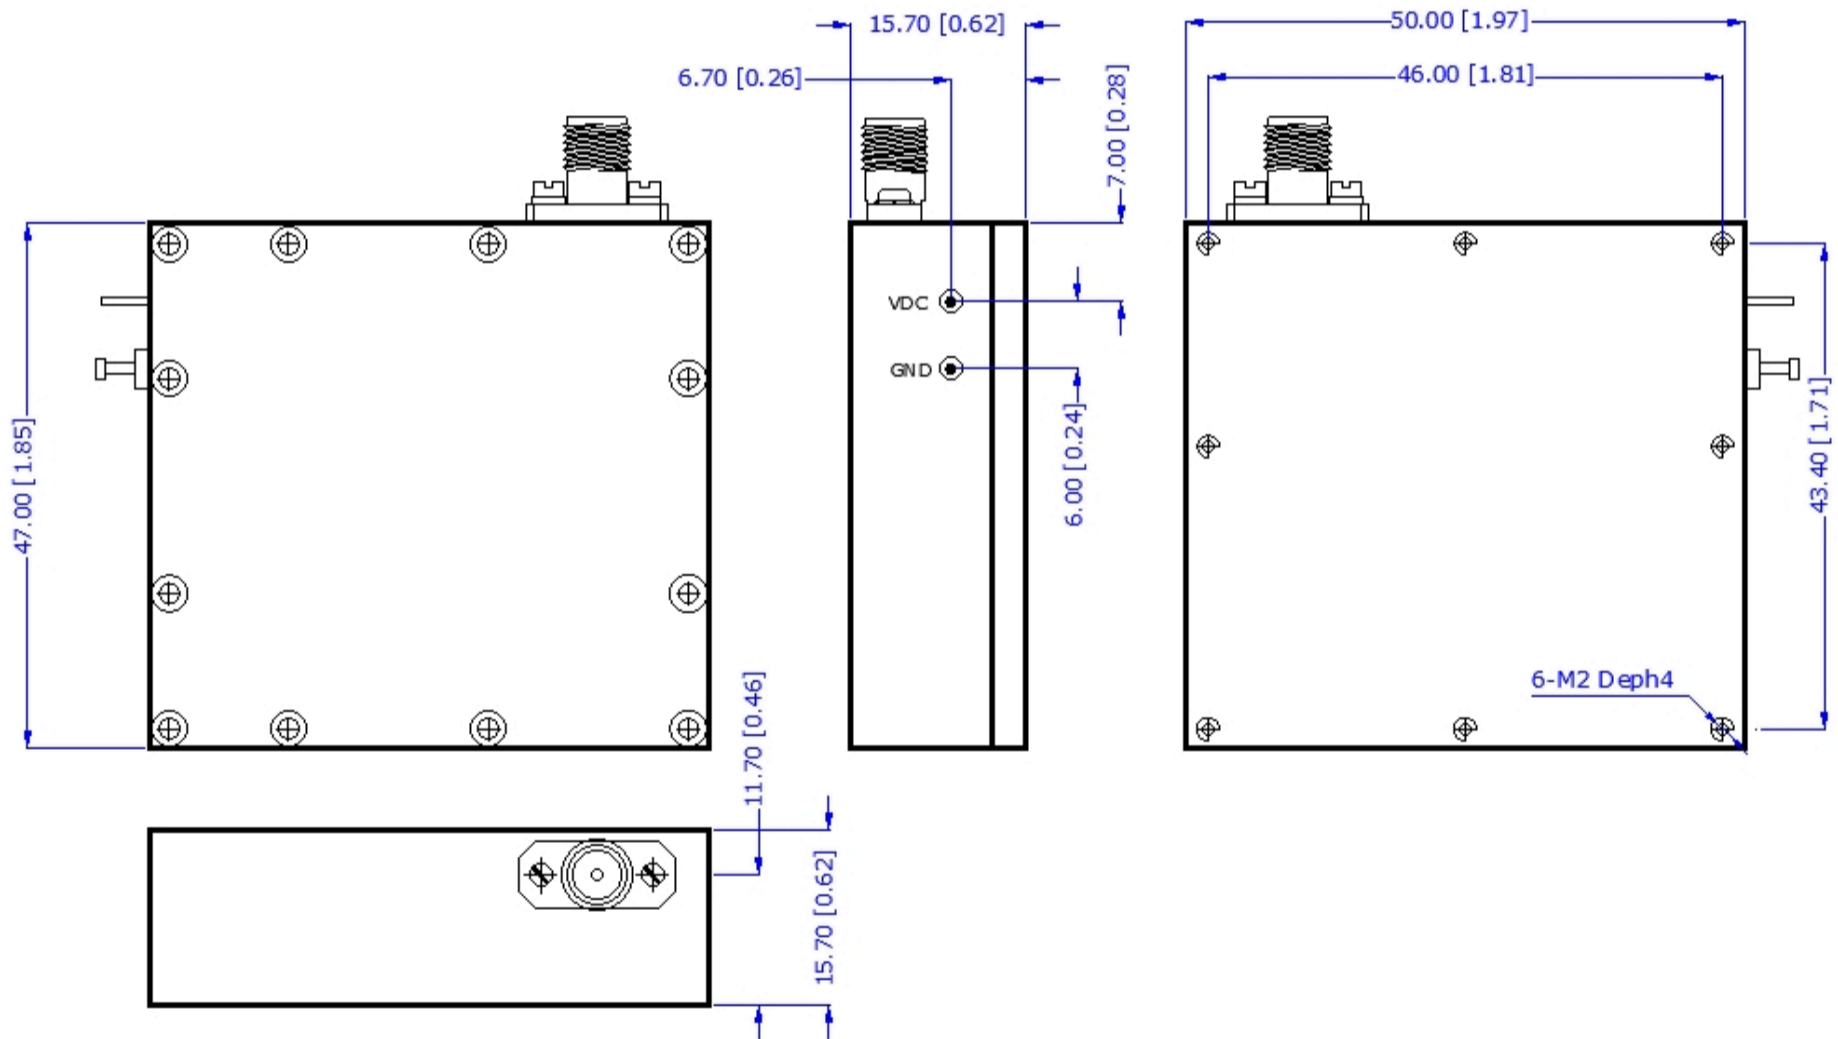

Dimensions are in mm [Inches]
 Tolerances : Outline drawing: ±0.2 [0.008]
 Hole: ±0.2 [0.008]