

## Features

- External Reference
- Output Power : 13dBm
- Output Freq. : 14 GHz
- Harmonics : -20 dBc
- RoHS and REACH Compliant

## Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Output Frequency	GHz		14	
Output Power	dBm		13±1	
Phase Noise@10Hz	dBc/Hz			-
Phase Noise@100Hz	dBc/Hz			-76
Phase Noise@1KHz	dBc/Hz			-112
Phase Noise@10KHz	dBc/Hz			-114
Phase Noise@100KHz	dBc/Hz			-114
Phase Noise@1MHz	dBc/Hz			-128
Reference Frequency	MHz		100	
Reference Input Power	dBm		0 ±3	
2nd Harmonics	dBc		-20	
Spurious	dBc		-60 (14GHz ±100MHz : -70)	
Supply Voltage	V		+15	
Current	mA		150	
Operating Temp.	°C	-40		+70
Lock Detect		TTL High (3.3V - 5V) in Lock ; TTL Low (0V -0.7V) Unlock		

## Note

- Electronic Specification Note : Values at 25deg , sea level. Test indicators will deteriorate at high and low temperature ;
- External Reference & Dual Loop Models Frequency Stability : Same as External Reference.
- External Ref. Phase noise deteriorate : =20 log ( Output Freq / Ref. Freq ) +3


**Mechanical Specifications**

Dimension L*W*H	50.8*47.8*15.7 mm
Ref. Connector	SMA-Female Stainless Steel
Output Connectors	SMA-Female Stainless Steel
Weight	85 g
Finishing	Nickel Plated
Environment	Nominal

**Compliance Certifications**


RoHS Compliant	✓
REACH Compliant	✓

**CAD Drawing**

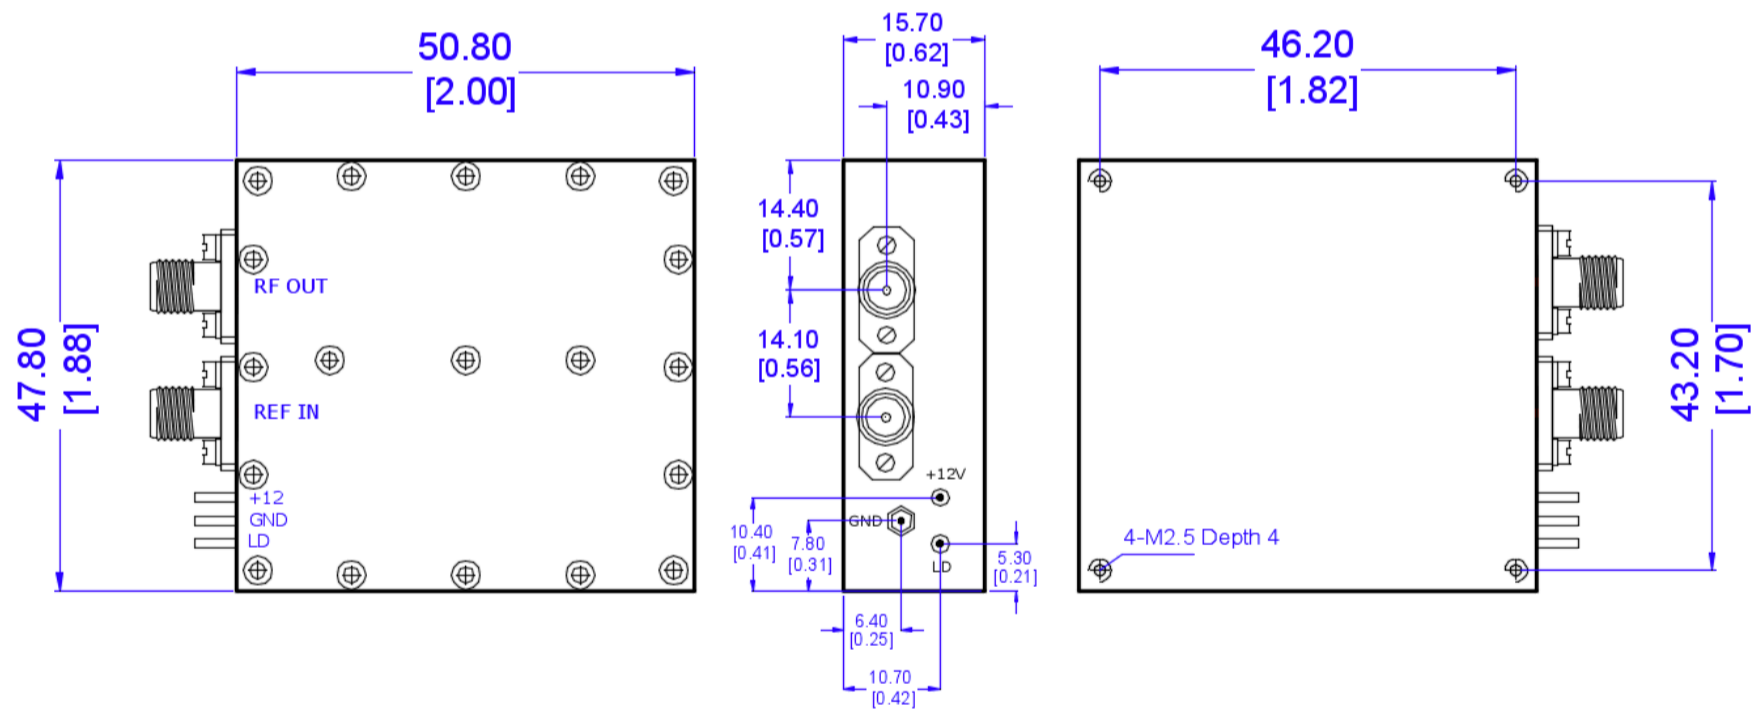


Dimensions are in mm [Inches]  
 Tolerances : Outline drawing: ±0.2 [0.008]  
 Hole: ±0.2 [0.008]

## Output Power

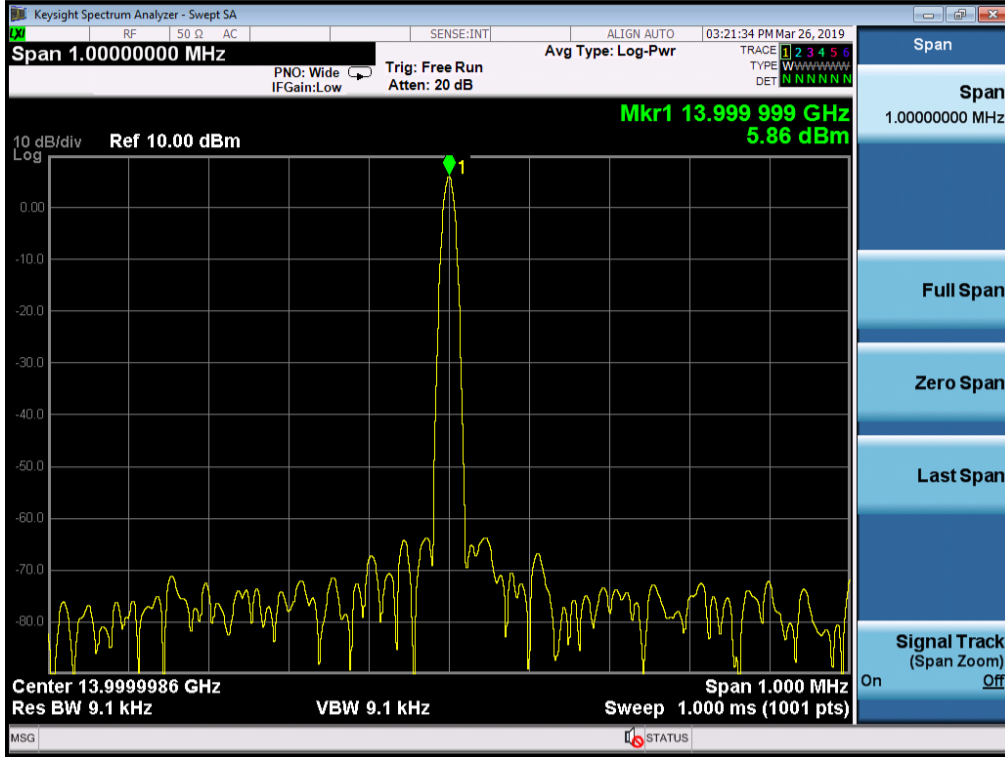

## Spurious and Harmonics

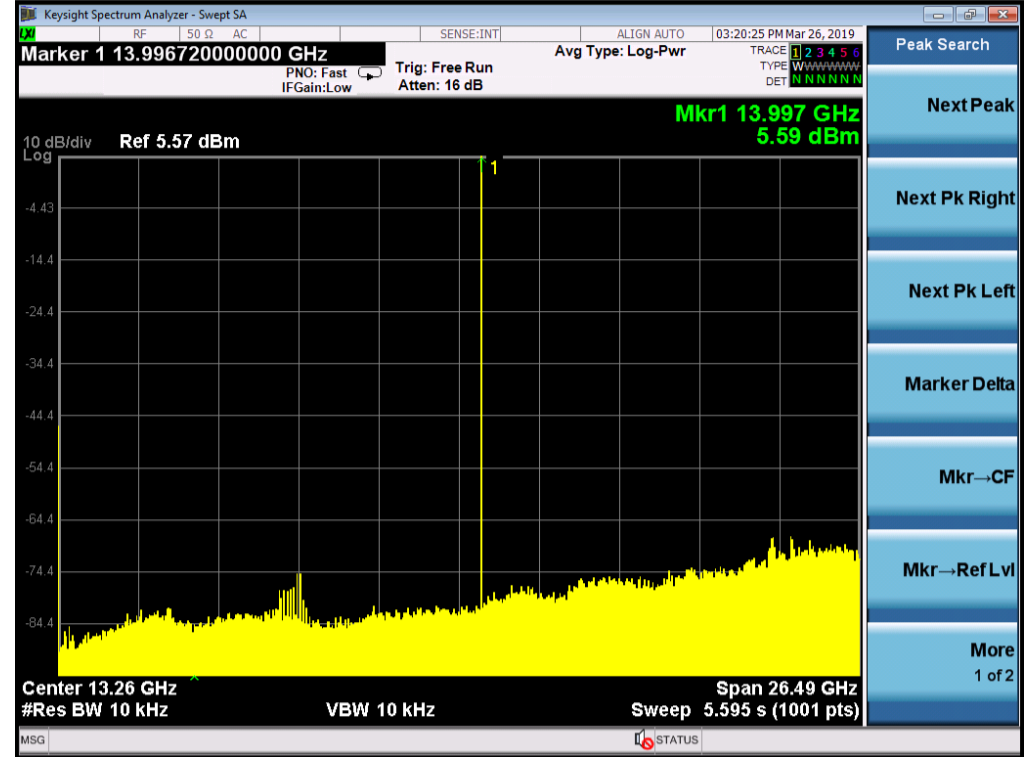

## Phase Noise (dBc/Hz)

